



T S R Q P O N M L K J I H G F E D C B A

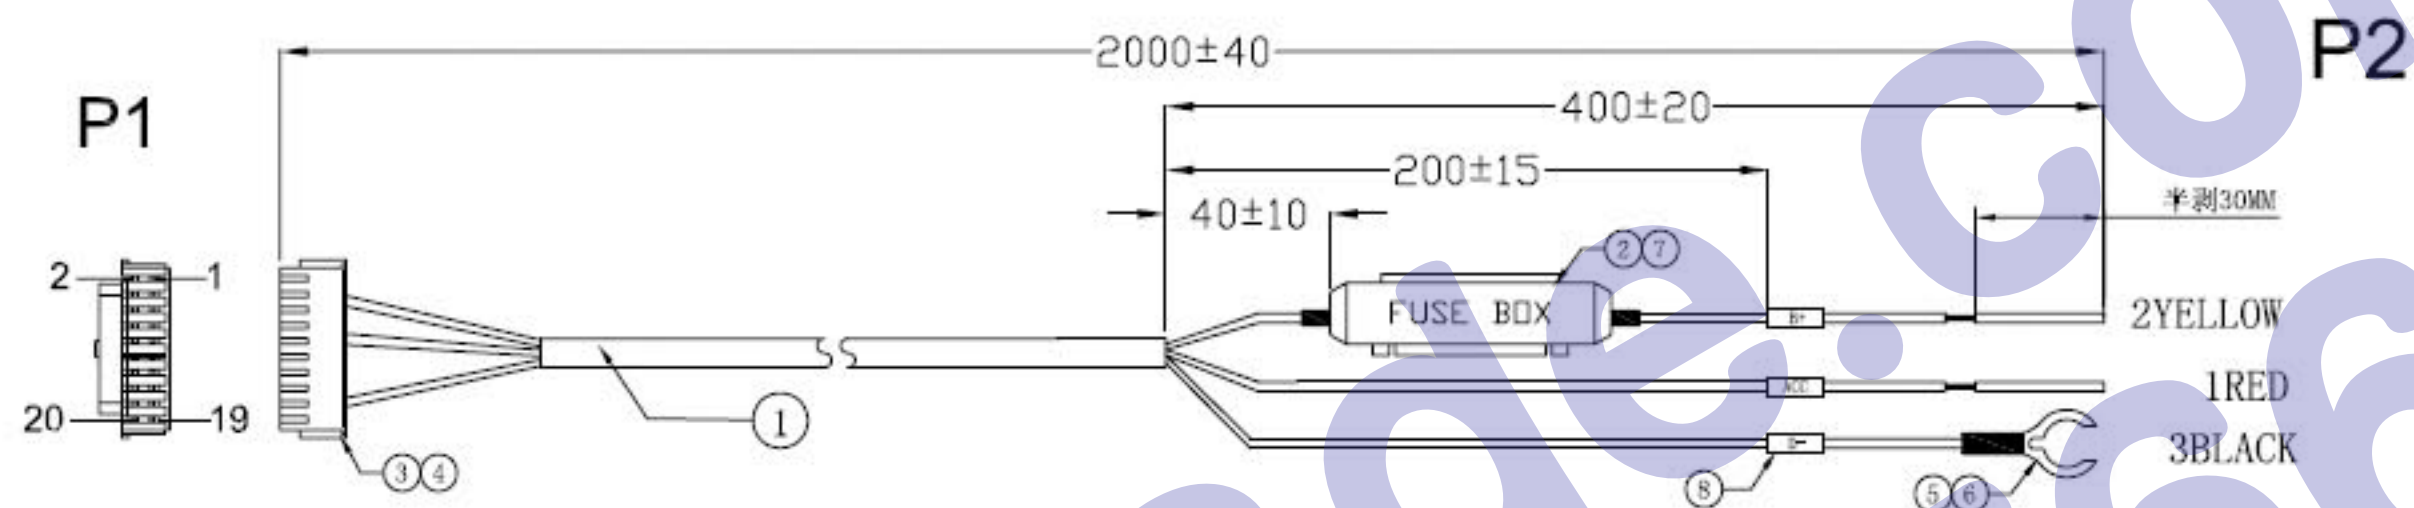

注意：保险丝端子要套 $\phi 1.5 \times 20\text{MM}$ 的套管

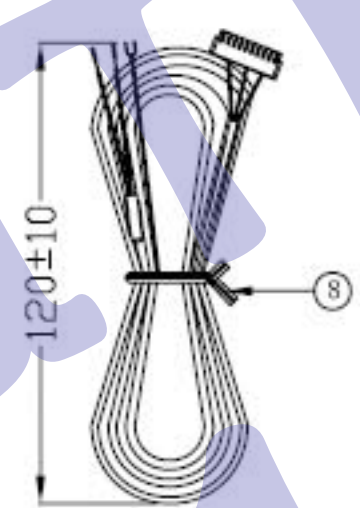

包装方式：如图扎线，单条装入指定骨袋。适量条装入带有防水袋的44*33*20外箱中。

PIN ASSIGNMENTS

P1	COLOR	P2
18	RED	1
14	YELLOW	2
12	BLACK	3

NO.	ITEM	DESCRIPTION	AMOUNT
①	CABLE	UL2464 24#(11/0.16BC)*3C RED, YELLOW, BLACK OD:3.5±0.1mm COLOR:BLACK L=3000MM	1PCS
②	FUSE BOX	FUSE BOX COLOR:BLACK FUSE(250V, 3A) TERMINAL	1PCS
③	TERMINAL	YH2.0 TERMINAL-F SMH200	3PCS
④	TERMINAL	YH2.0母胶壳 SMH200-20P母胶壳	1PCS
⑤	Y型TER	Y型 TERMINAL 855-BS-2	1PCS
⑥	H. S. TUBE	$\phi 3.5\text{mm} \times 20\text{mm}$ BLACK (普通型)	1PCS
⑦	H. S. TUBE	$\phi 1.5\text{mm} \times 20\text{mm}$ BLACK (普通型)	1PCS
⑧	LABLE	$\phi 1.5$ 白色标签套管ACC B+ D-	各1PCS
⑨	MINI TIE	L=120MM BLACK OVAL TIE	1PCS

TEST REQUEST:

- 1.OPEN SHORT 100%
- 2.CT $\leq 2\Omega$ IS $\geq 5M\Omega$
- 3.HV:DC 300V TIME: 0.1SEC

DRAWN BY	Famous	CUSTOMER	HDC 有限公司	
APPROVED		TITLE	FUSE CABLE	
-TOLERANCES-		THIRD ANGLE PROJECTION	SHEET: 1/1	DRAWING NO: JS003341
XX±0.5 XXX±0.10			UNIT: mm	DATE: FEB-3-2015
ANGLES ±5				REV. 1X