


RoHS Compliant

REV	DESCRIPTION	APPRO.	CHANGE	DATE
△00	原始尺寸			

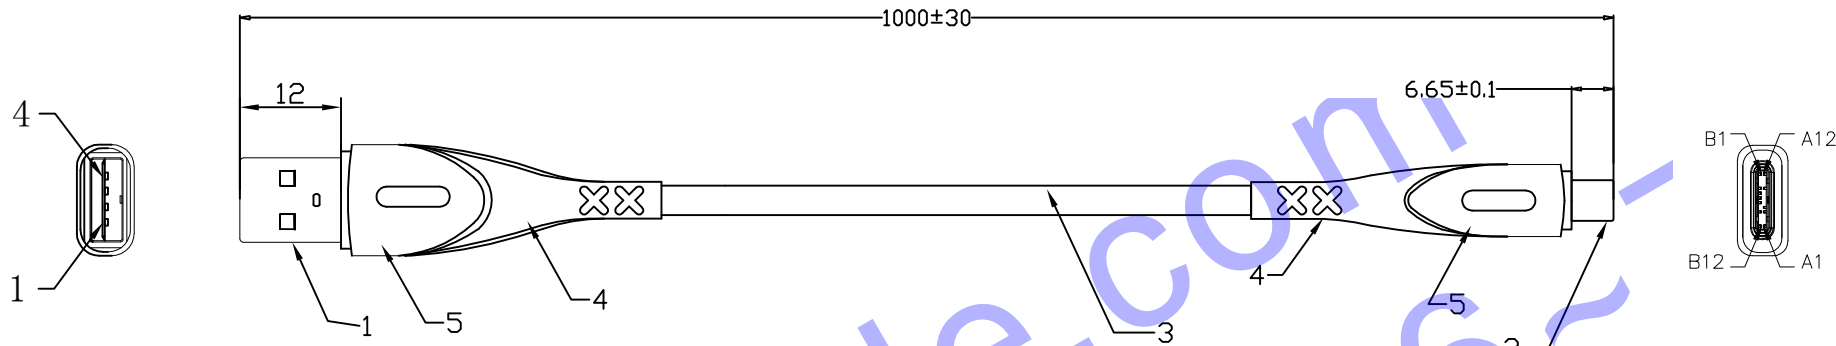

1M	1000±30MM
2M	2000±30MM

ELECTRICAL PROPERTIES:

- 100% OPEN SHORT MIS-WIRE TEST
- Contact Resistance:10ohm
- Insulation Resistance:5Mega ohm
- Hipot test: 300V/10ms

PIN ASSIGNMENT:

TYPE C MALE		USB2.0 A MALE	
A1,B1,A12,B12	GED	_____	4 BLACK
A4,B4,A9,B9	VBUS	_____	1 RED
A5	NO	_____	
B5	NO	_____	
DP1	A6	_____	3 GREEN
DN1	A7	_____	2 WHITE

5	ZINX ALLOY SHELL	2
4	PVC 45P BLACK IN COLOR	1
3	ND-UL 22AWG*2C+28AWG*1P BC DD3.2 PVC JACKET BLACK IN COLOR	1
2	TYPE C MALE SHELL PLATED NICKEL CONTACT:G/F	1
1	USB 2.0 A TYPE MALE SHELL NICKEL CONTACT G/F	1
NO.	DESCRIPTION	Q'TY

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	PAPER: A4	HDC电子有限公司	
MM		REV: 00	UNITS: MM		
.X	±0.38	DRAWING BY: JACK	DATE: 2020/05/05	NAME: USB AM TO CM 5A CABLE	
.XX	±0.25	CHECKED BY: ERIC	DATE: 2020/05/05	THIRD ANGLE PROJECTION	
.XXX	±0.13	APPROVED BY:	DATE: 2020/05/05	REVISE ON CAD ONLY	
ANGULAR ±3°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO.	DWG NO.
				SHEET NO. 1/1	