



P. C. B LAYOUT  
TOP VIEW

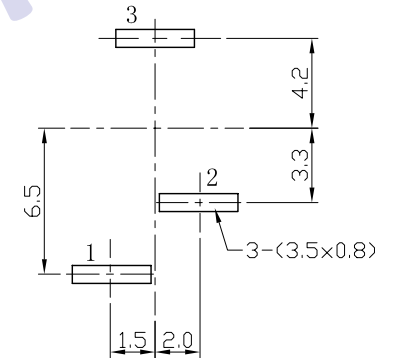

SCHEMATIC



**SPECIFICATION**

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 0.03\Omega$ ;
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

PIN	$\phi 2.0$	$\phi 2.5$	
APPD.			

6	COVER	1	PF	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-Plating
2	FLAT PIECE	1	BRASS	Sn-Plating
3	CONTACT FOOT	1	BRASS	Sn-Plating
1	SPRING	1	STAINLESS STEEL	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1		
	DC JACK	DC0015A-X	TOLERANCE	ANGLES	SCALE	VER
			$\pm 0.15$	$\pm 1.5^\circ$	3:1	1

DESIGNER BY:		<h2 style="font-size: 2em;">HDC有限公司</h2>
CHECK BY:		
APPROVED BY:		