



P.C.B
LAYOUT
VIEW

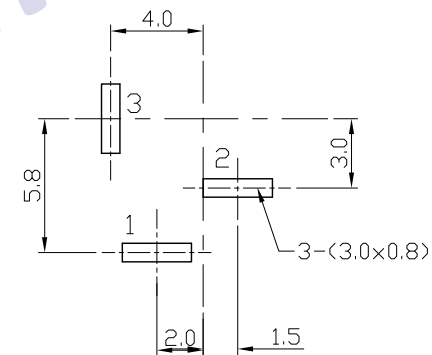

SCHEMATIC



PIN	ø2.0	ø2.35	ø2.5
APPD			

SPECIFICATION

1. Rating ? DC 30V 0.5A?
2. Contact resistance ≤0.03? ?
3. Insulation resistance ≥100M? (DC250V)?
4. Withstand voltage ≥500VAC ?
5. Insertion and extraction force ?
6. Life test ≥5,000 cycles ?

6	COVER	1	PBT	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-Plating
3	FLAT PIECE	1	BRASS	Sn-Plating
2	CONTACT	1	BRASS	Sn-Plating
1	SPRING	1	STAINLESS STEEL	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT:MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1
	DC JACK	DC00160-X	TOLERANCE: ±0.15	SCALE: 3:1
			ANGLES: ±1.5°	VER: 1

DESIGNER		HDC有限公司
CHECK		
APPROVED		