



P.C.B
LAYOUT
VIEW

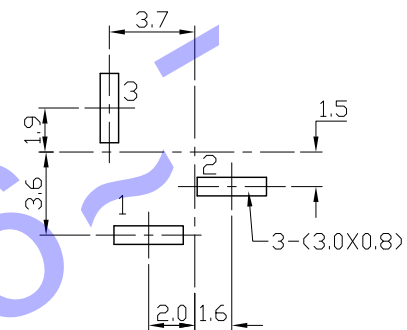

SCHEMATIC



PIN	∅2.0	∅2.35	∅2.5
APPD.			

- SPECIFICATION**
1. Rating ? DC 30V 0.5A?
 2. Contact resistance 50m?
 3. Insulation resistance 100M? (DC250V)?
 4. Withstand voltage 500VAC ?
 5. Insertion and extraction force ?
 6. life test 5,000 cycles

6	COVER	1	PF	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-Plating
3	CONTACT	1	BRASS	Sn-Plating
2	FOAT PIECE	1	BRASS	Sn-Plating
1	SPRING	1	STAINLESS STEEL	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT:MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1
	DC JACK	DC00210-X	A4	
			TOLERANCE	ANGLES SCALE VER
			±0.3	±2° 1:1 1

DESIGNER
BY
CHECK
BY
APPROVED
BY

HDC有限公司