



P.C.B
LAYOUT
VIEW

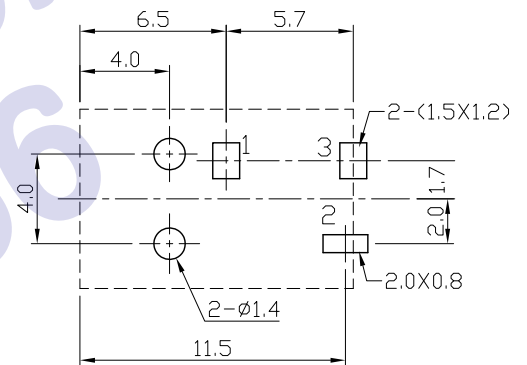

SCHEMATIC



SPECIFICATION

1. Rating ? DC 30V 0.5A?
2. Contact resistance $30m\Omega$?
3. Insulation resistance $100M\Omega$ (DC250V)?
4. Withstand voltage $500VAC$?
5. Insertion and extraction force $2-25N$?
6. life test $15,000$ cycles

4	HOUSING	1	PBT	
3	PIN	1	BRASS	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	SPRING	1	BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO:	
	DC JACK	DC00280-X	A4	PAGE 1 OF 1
			TOLERANCE	SCALE
			±0.3	1:1
			ANGLES	VER
			±2°	1
DESIGNER		HDC有限公司		
CHECK				
APPROVED				