

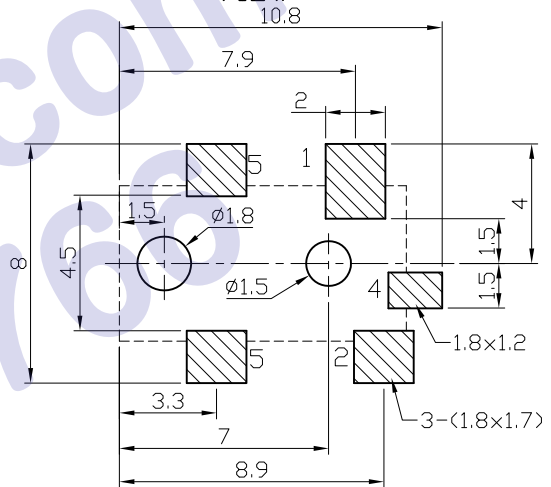


P.C.B
LAYOUT
VIEW

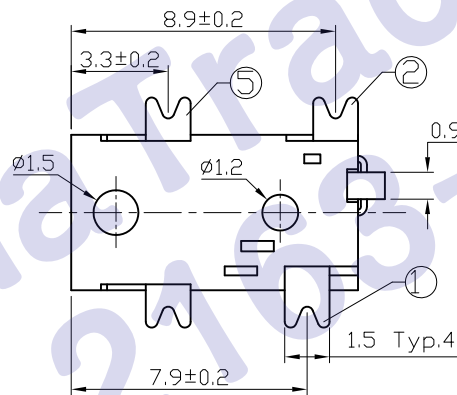

SCHEMATIC



SPECIFICATION

1. Rating ? DC 30V 0.5A?
2. Contact resistance ≤50m?
3. Insulation resistance ≥100M? (DC250V)?
4. Withstand voltage ≥500VAC ?
5. Insertion and extraction force ≤25N;
6. life test ≥5,000 cycles

6	HOUSING	1	PA9T	
5	CONTACT FOOT	1	BRASS	Ag-Plating
4	PIN	1	BRONZE	Ag-Plating
3	CURVE PIECE	1	STAINLESS STEEL	Ag-Plating
2	CURVE PIECE	1	BRASS	Ag-Plating
1	SPRING	1	Be-Cu	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE: DC JACK	MODEL NO: DC00410-X	PAPER NO: 717	PAGE 1 OF 1
			TOLERANCE	SCALE
			±0.3	1:1
			±2°	VER
				1

DESIGNER		HDC有限公司
BY: CHECK		
BY: APPROVED		
BY:		