


P. C. B Layout
(Printed-sided view)

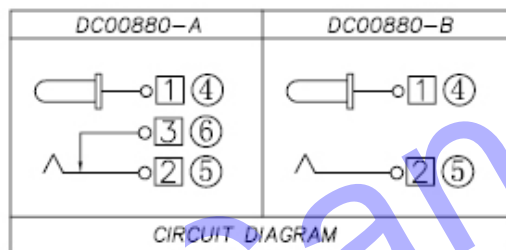


□ : TERMINAL NO. ○ : ITEM NO.

Model No.	DC00880- <u>D</u>	DC00880- <u>E</u>	DC00880- <u>F</u>
PIN	φ1.10	φ1.30	φ1.45

SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

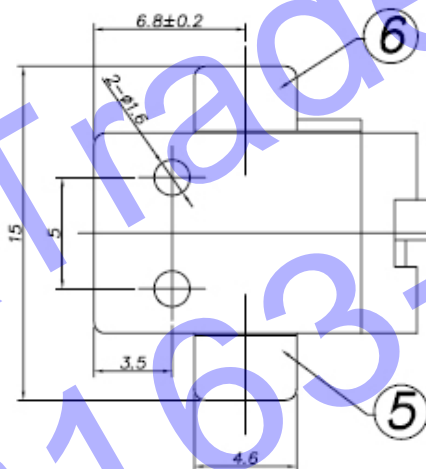

6	Shunt terminal	1	Brass t=0.5	Ag-Plating
5	Tip spring	1	Bronze t=0.25	Ag-Plating
4	Center pin terminal	1	Brass t=0.5	Ag-Plating
3	Center pin	1	Brass	Ni-Plating
2	Cover	1	PA9T, UL-94V-0	
1	Housing	1	PA9T, UL-94V-0	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	DC POWER JACK	DC00880-__	TOLERANCE	ANGLES
			±0.3	±2'
			SCALE	VER
			FULL	1

DESIGNER BY: *YUJUN* 2007.6.6
CHECK BY:
APPROVED BY:

HDC 有限公司私