



SCHEMATIC



P.C.B LAYOUT TOP VIEW

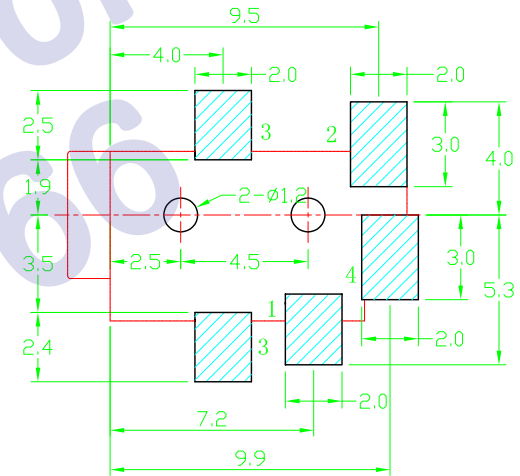

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $> 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-15N;
6. life test: 5,000 cycles.

5	HOUSING	1	PA9T	
4	PIN	1	BRONZE	Ag/Au-Plating
3	CONTACT FOOT	1	BRONZE	Ag/Au-Plating
2	CURVE PIECE	1	BRASS	Ag/Au-Plating
1	SPRING	1	BRONZE	Ag/Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1	
	DC JACK	DC00940	TOLERANCE	ANGLES	SCALE
			± 0.3	$\pm 2^\circ$	1:1
					VER
					1

DESIGNER BY:		<h1>HDC有限公司</h1>
CHECK BY:		
APPROVED BY:		