



REFERENCED PLACEMENT HOLE'S DIMENSION

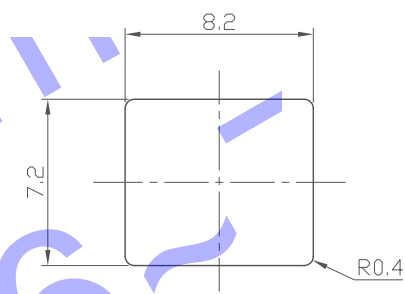

REFERENCED DIMENSION

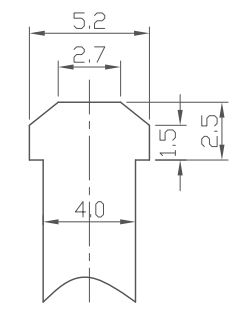

SPECIFICATION

1. Action Power: 3-5N;
2. Life test: ≥10,000 cycles ;
3. Temperature: -25~+85°C;
4. Withstand Voltage: AC 250V(50Hz)/min;
5. Insulation Resistance: 100MΩ.

4	CORE	1	POM	
3	SPRING	1	SPRING STEEL	Ni-Plating
2	BUTTON	1	PA66	
1	HOUSING	1	PC	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4 PAGE 1 OF 1	
		PR-04	TOLERANCE	ANGLES SCALE VER
			±0.20	±1.5° 3:1 1
DESIGNER BY:			<b>H D C 有限公司</b>	
CHECK BY:				
APPROVED BY:				