


RoHS COMPLIANT

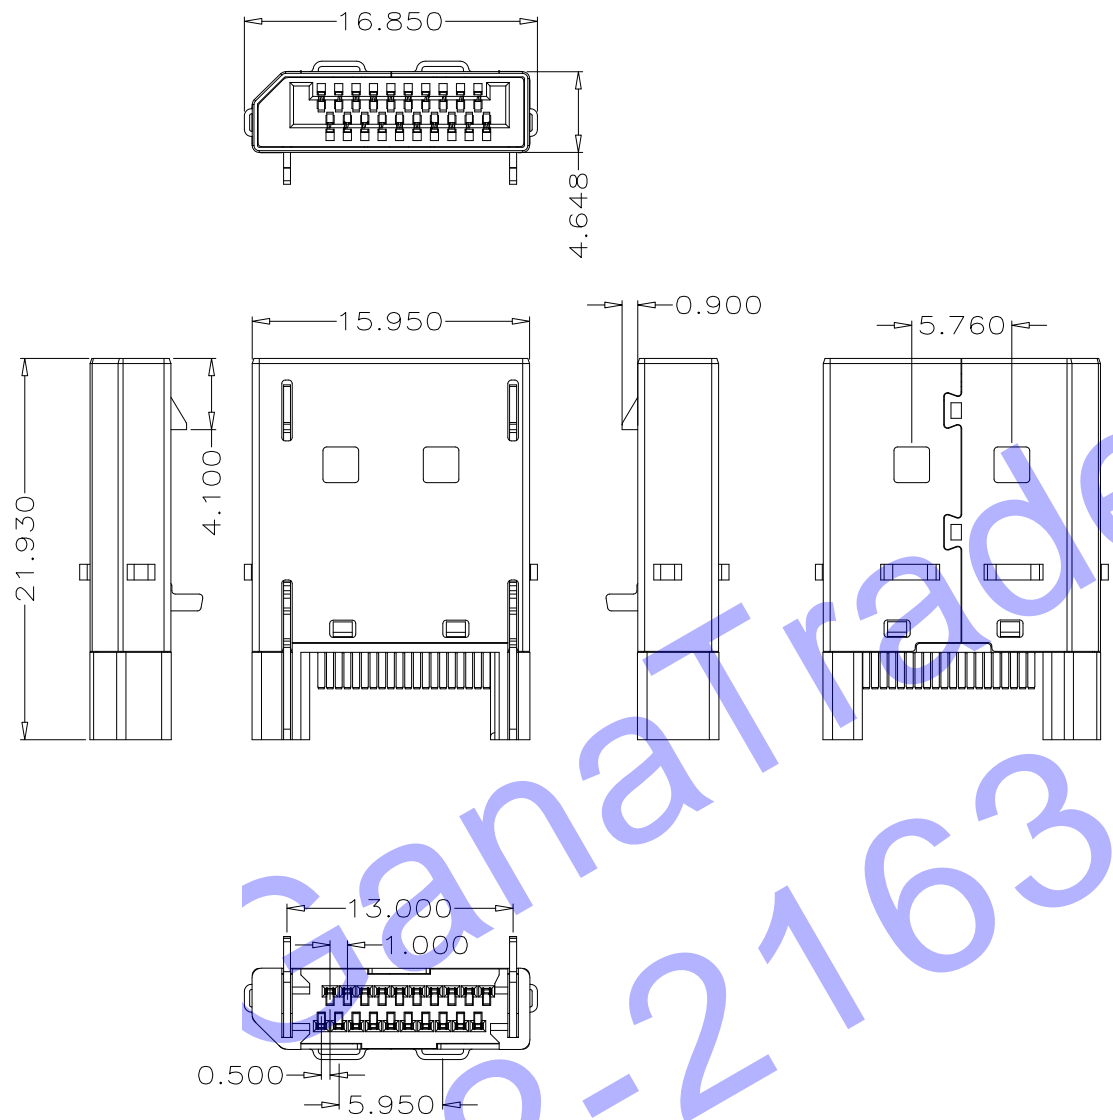

NOTES:

1. 电气特性:
  - 1) 接触阻抗: 30mΩ MAX (初始) FOR VBUS AND GND CONNECTS, 其它 50mΩ MAX (初始)
  - 环境与寿命测试后的变化值: +10Ω MAX
  - 2) 绝缘阻抗: 100MΩ MIN.
  - 3) 额定电流: 1.5A
  - 4) 耐压: 100V AC (RMS)
2. 机械特性
  - 1) 插入力: 35N MAX.
  - 2) 拔出力: 10N (初始) MIN. 寿命测试后: 8N MIN.
  - 3) 寿命: 5000 CYCLES
3. 环境特性: 使用温度: -40° C-85° C
4. 符合本公司环境物质管理标准

REV		DESCRIPTION	DATE	QUALITY SYMBOLS	UNIT	SCALE	TOLERANCES	ITEM	DESC	MATERIAL			REMARKS		
				■ : CRITICAL ☒ : MAJOR ▽ : ZERO DEFECT ▽ : S.P.C	mm	2.5 : 1	DIM. ± 0.20 ANGLE: 3°	APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	SHT	1/1	
A 图面发行				'12-12-09									DESCRIPTION	DisplayPort HAVE HOOK Type PLUG	【客户用图】
REV				DESCRIPTION	DATE							DRAWING NO.	REV	A	