

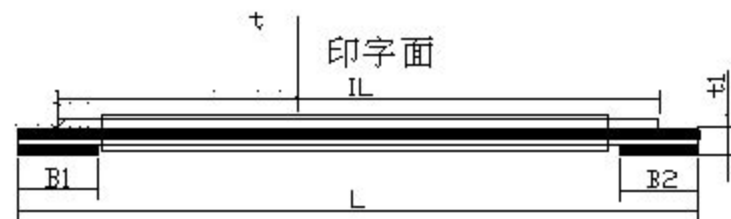


H D C 有限公司

Customer Part NO. (客户部品号): 美星电子

Part Descripon (部品规格): 0.5*6*45*A (3/3/4/4)*(0.035*0.3)

Item	项目	Specification 规格值
NO. of conductors	导体芯数 N	6
Pitch	间距 P	0.5±0.05
Total Pitch	全间距 PT	2.5±0.05
Total Length	总长度 L	45±2
Insulation Length	绝缘长度 IL	39±2
Margin Width	边缘宽度 M	0.5±0.08
Total Width	总宽度 W	4.5±0.08
Strip Length	线口长度 S1	3±0.5
Strip Length	线口长度 S2	3±0.5
Reinforeing tape length	补强板长度 B1	4±1
Reinforeing tape length	补强板长度 B2	4±1
Slanting	线口倾斜度 A	≤0.3
Over lap	冲孔	/
Terminal thickness	插入厚度 t1	0.3±0.05
Thickness insulation	线身厚度 t	0.12±0.05
Conductor thickness	导体厚度 Ct	0.035±0.005

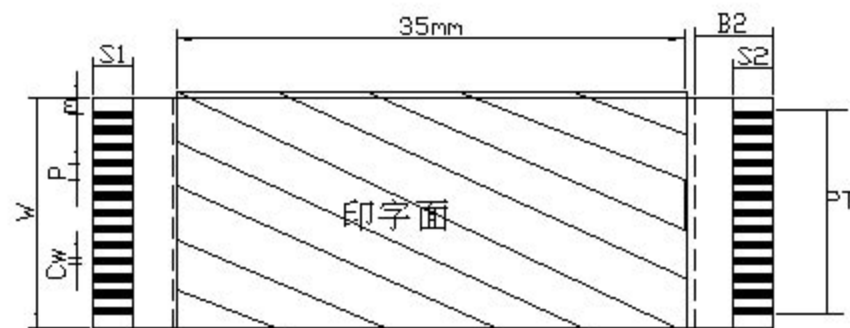

注明：阴影部分为包35mm铝箔。

Conductor width	导体宽度 Cw	0.3±0.05
Supporting Tapc Color	补强板颜色	蓝色(Blue)
PET(Supporting Tapc Color)补强板规格		0.225mm
PET(Insulation)	绝缘胶规格	0.043mm 韩文胶膜
PET(Insulation)	绝缘胶规格	0.043mm 白膜
Rev	版本	A

Storage condition(储存条件):Recommended(推荐)			
Temp:15° C~25° C(温度15° C~25° C)Humidity:30~60RH%(湿度30~60RH%)			
Drawing Not To Scale Hidden Lines Not Shown 图规不能以其线材比便来 测量，隐藏线不显示。	Discharge Date 发行日期	Review Date 修订日期	Drawing NO 图纸编号
	2007-05-21	2015-12-10	20151210-053
Unit(单位):mm	Drawing by 制图	Checked by 校对	Approved by 确认