

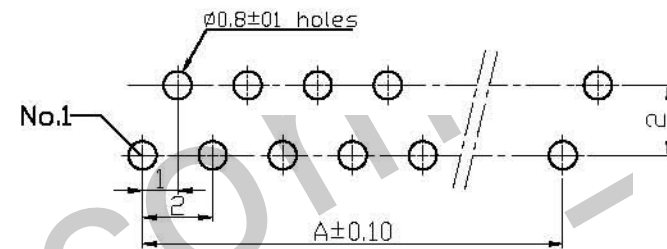
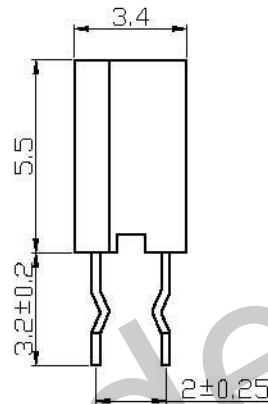


版次	日期	内 容
A	05.06.10	原始版本

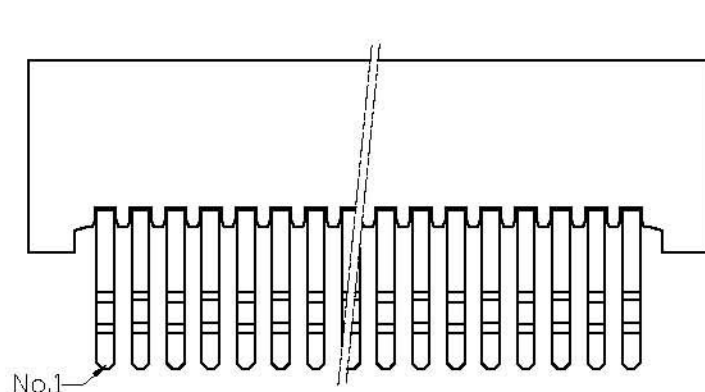


适用线路板

RECOMMENDED PCB LAYOUT

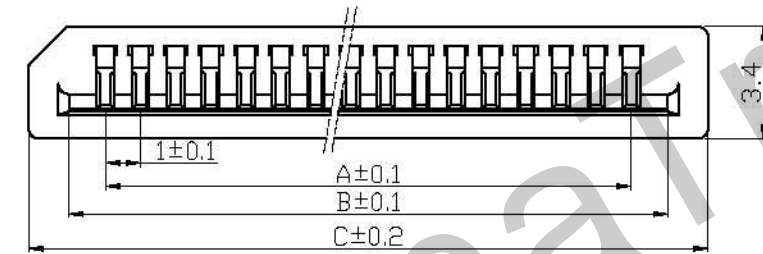

Pin 位	Type	A	B	C	Pin 位	Type	A	B	C
4	1.0A-4PS	3	5.1	7.6	24	1.0A-24PS	23	25.1	27.6
5	1.0A-5PS	4	6.1	8.6	25	1.0A-25PS	24	26.1	28.6
6	1.0A-6PS	5	7.1	9.6	26	1.0A-26PS	25	27.1	29.6
7	1.0A-7PS	6	8.1	10.6	27	1.0A-27PS	26	28.1	30.6
8	1.0A-8PS	7	9.1	11.6	28	1.0A-28PS	27	29.1	31.6
9	1.0A-9PS	8	10.1	12.6	29	1.0A-29PS	28	30.1	32.6
10	1.0A-10PS	9	11.1	13.6	30	1.0A-30PS	29	31.1	33.6
11	1.0A-11PS	10	12.1	14.6	31	1.0A-31PS	30	32.1	34.6
12	1.0A-12PS	11	13.1	15.6	32	1.0A-32PS	31	33.1	35.6
13	1.0A-13PS	12	14.1	16.6	33	1.0A-33PS	32	34.1	36.6
14	1.0A-14PS	13	15.1	17.6	34	1.0A-34PS	33	35.1	37.6
15	1.0A-15PS	14	16.1	18.6	35	1.0A-35PS	34	36.1	38.6
16	1.0A-16PS	15	17.1	19.6	36	1.0A-36PS	35	37.1	39.6
17	1.0A-17PS	16	18.1	20.6	37	1.0A-37PS	36	38.1	40.6
18	1.0A-18PS	17	19.1	21.6	38	1.0A-38PS	37	39.1	41.6
19	1.0A-19PS	18	20.1	22.6	39	1.0A-39PS	38	40.1	42.6
20	1.0A-20PS	19	21.1	23.6	40	1.0A-40PS	39	41.1	43.6
21	1.0A-21PS	20	22.1	24.6					
22	1.0A-22PS	21	23.1	25.6					
23	1.0A-23PS	22	24.1	26.6					

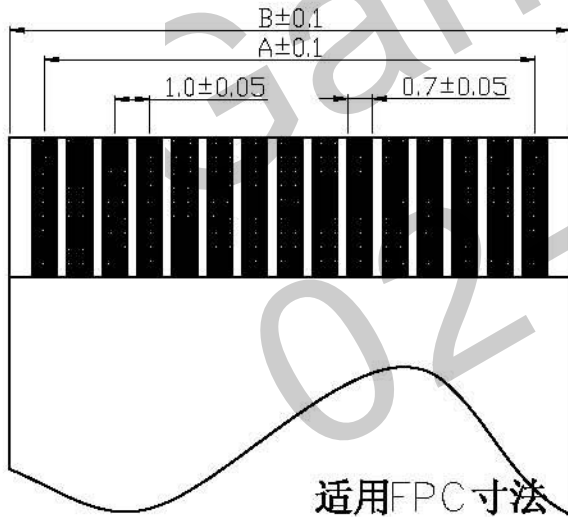

0.3±0.03

材料

MATERIAL

外壳: 尼龙46 UL94V-0 本色
Housing: Nylon46 UL94V-0 Grey
接触件: 磷青铜, 表面镀锡合金
Contact: Phosphor bronze, tin/lead plated

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、未注公差按SJ1372-79中7级;
- 3、温度范围: -25°C~85°C;
- 4、额定电压: 50V, AC, DC;
- 5、接触电阻: ≤0.05Ω;
- 6、绝缘电阻: ≥500MΩ;
- 7、耐压: 500V, AC/minute.

适用FPC寸法

APPLICABLE FPC

组成	材料	
端子	C5210R-EH(磷青铜)	表面附着Ni1um以上, Sn2.5以上
基座	PA46(尼龙) UL94-0 本色	GANAELECTRONIC
制作:	审核:	批准:
洪新江	洪新江	
		71141-1.0A-nPS