
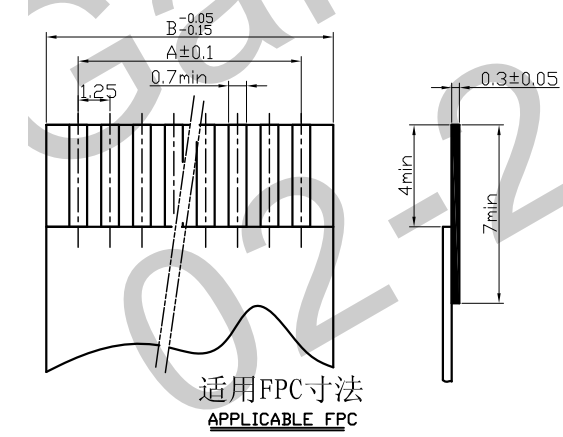

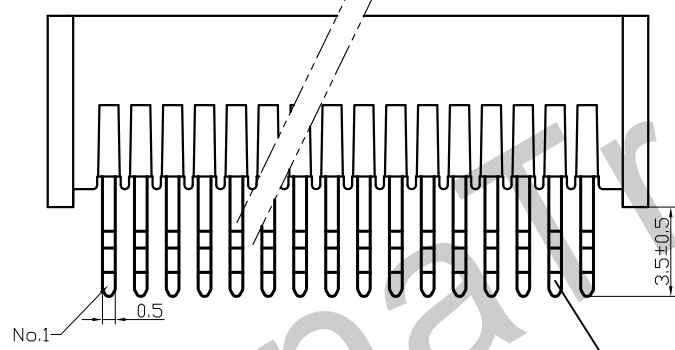
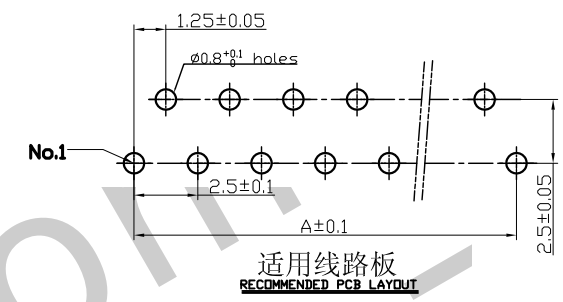


1.25A-直插正脚承认图面

REV.	DESCRIPTION	DATE
A/0	原始版本	07.06.10
A/1	修订版本	08.09.20

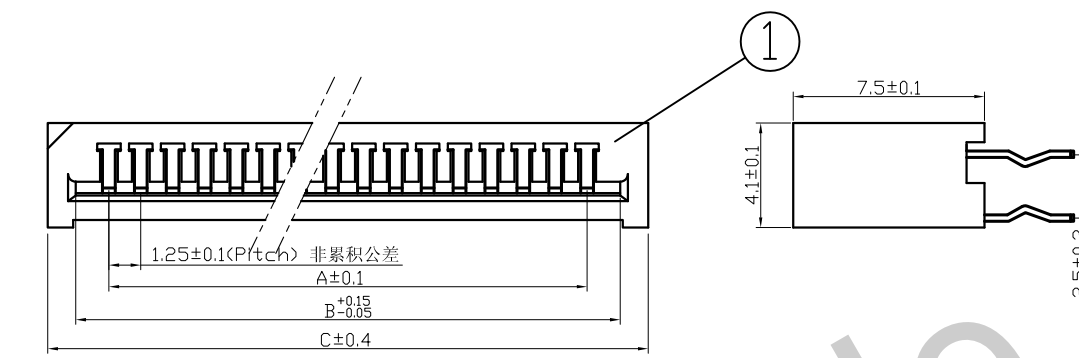

- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: -25° C~85° C;
 - 3、额定电压: 200V, AC, DC(等效);
 - 4、接触电阻: ≤0.03 Ω;
 - 5、绝缘电阻: ≥500Ω;
 - 6、耐压: 500V, AC/minute.

- ROHS管理规定:
- 1、禁止使用含有ROHS指令所限制的物质。
 - 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 有效期一年。

Pin位	Type	A	B	C	Pin位	Type	A	B	C
4	1.25A-4PL	3.75	6.35	8.55	24	1.25A-24PL	28.75	31.35	33.55
5	1.25A-5PL	5	7.6	9.8	25	1.25A-25PL	30	32.6	34.8
6	1.25A-6PL	6.25	8.85	11.05	26	1.25A-26PL	31.25	33.85	36.05
7	1.25A-7PL	7.5	10.1	12.3	27	1.25A-27PL	32.5	35.1	37.3
8	1.25A-8PL	8.75	11.35	13.55	28	1.25A-28PL	33.75	36.35	38.55
9	1.25A-9PL	10	12.6	14.8	29	1.25A-29PL	35	37.6	39.8
10	1.25A-10PL	11.25	13.85	16.05	30	1.25A-30PL	36.25	38.85	41.05
11	1.25A-11PL	12.5	15.1	17.3	31	1.25A-31PL	37.5	40.1	42.3
12	1.25A-12PL	13.75	16.35	18.55	32	1.25A-32PL	38.75	41.35	43.55
13	1.25A-13PL	15	17.6	19.8	33	1.25A-33PL	40	42.6	44.8
14	1.25A-14PL	16.25	18.85	21.05	34	1.25A-34PL	41.25	43.85	46.05
15	1.25A-15PL	17.5	20.1	22.3	35	1.25A-35PL	42.5	45.1	47.3
16	1.25A-16PL	18.75	21.35	23.55		1.25A-36PL	43.75	46.35	48.55
17	1.25A-17PL	20	22.6	24.8		1.25A-37PL	45	47.6	49.8
18	1.25A-18PL	21.25	23.85	26.05		1.25A-38PL	46.25	48.85	51.05
19	1.25A-19PL	22.5	25.1	27.3		1.25A-39PL	47.5	50.1	52.3
20	1.25A-20PL	23.75	26.35	28.55		1.25A-40PL	48.75	51.35	53.55
21	1.25A-21PL	25	27.6	29.8					
22	1.25A-22PL	26.25	28.85	31.05					
23	1.25A-23PL	27.5	30.1	32.3					

4					
3					
2	130-0100-002	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(铜): 整个表面镀层20-40u", 再镀镍80-150u".
1	130-0300-001	基座 Housing	PA46(UL94V-0)	1	壳

序号	图号	名称	材料	数量	附注			
未注公差			HDC 有限公司					
X.° ±3° X.X° ±0.5°								
<10	10-30	>30	单位	比例	Design Units	SIZE	页码	
±0.2	±0.25	±0.3	MM Only	—	METRIC	A4	1 OF 1	
制作	审核	批准	材料	图号	130-1000-020	Part No	F125010-**-4**	
胡海针	洪新江	H.DR	见图解	品名	1.25A-nPL			

旧底图总号
底图总号
签字
日期