
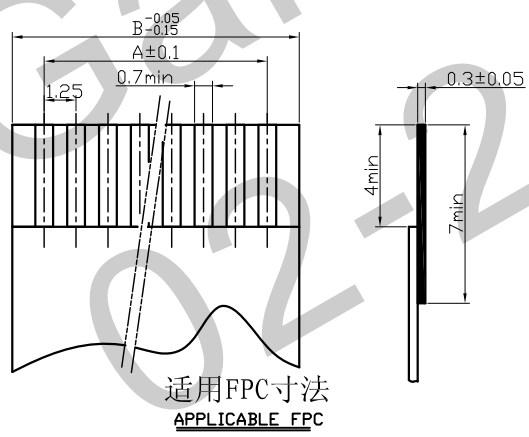
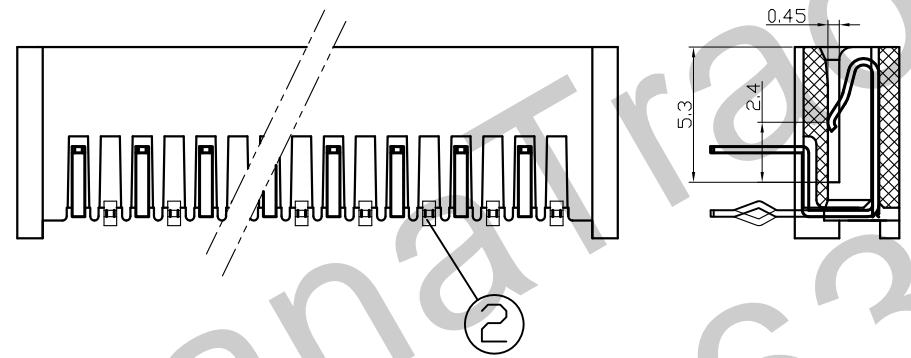
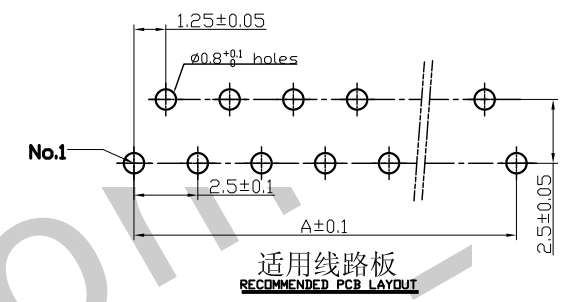


# 1.25A-弯插上接正脚承认图面

REV.	DESCRIPTION	DATE
A/0	原始版本	07.06.10
A/1	修订版本	08.09.20

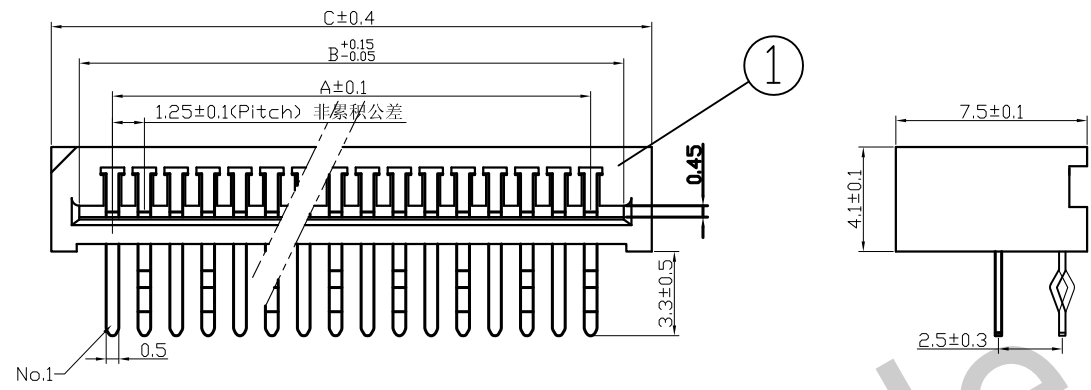

- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
  - 2、温度范围: -25° C~85° C;
  - 3、额定电压: 200V, AC, DC(等效);
  - 4、接触电阻: ≤0.03 Ω;
  - 5、绝缘电阻: ≥500M Ω;
  - 6、耐压: 500V, AC/minute.

- ROHS管理规定:
- 1、禁止使用含有ROHS指令所限制的物质。
  - 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 有效期一年。

Pin位	Type	A	B	C	Pin位	Type	A	B	C
4	1.25A-4PWS	3.75	6.35	8.55	24	1.25A-24PWS	28.75	31.35	33.55
5	1.25A-5PWS	5	7.6	9.8	25	1.25A-25PWS	30	32.6	34.8
6	1.25A-6PWS	6.25	8.85	11.05	26	1.25A-26PWS	31.25	33.85	36.05
7	1.25A-7PWS	7.5	10.1	12.3	27	1.25A-27PWS	32.5	35.1	37.3
8	1.25A-8PWS	8.75	11.35	13.55	28	1.25A-28PWS	33.75	36.35	38.55
9	1.25A-9PWS	10	12.6	14.8	29	1.25A-29PWS	35	37.6	39.8
10	1.25A-10PWS	11.25	13.85	16.05	30	1.25A-30PWS	36.25	38.85	41.05
11	1.25A-11PWS	12.5	15.1	17.3	31	1.25A-31PWS	37.5	40.1	42.3
12	1.25A-12PWS	13.75	16.35	18.55	32	1.25A-32PWS	38.75	41.35	43.55
13	1.25A-13PWS	15	17.6	19.8	33	1.25A-33PWS	40	42.6	44.8
14	1.25A-14PWS	16.25	18.85	21.05	34	1.25A-34PWS	41.25	43.85	46.05
15	1.25A-15PWS	17.5	20.1	22.3	35	1.25A-35PWS	42.5	45.1	47.3
16	1.25A-16PWS	18.75	21.35	23.55		1.25A-36PWS	43.75	46.35	48.55
17	1.25A-17PWS	20	22.6	24.8		1.25A-37PWS	45	47.6	49.8
18	1.25A-18PWS	21.25	23.85	26.05		1.25A-38PWS	46.25	48.85	51.05
19	1.25A-19PWS	22.5	25.1	27.3		1.25A-39PWS	47.5	50.1	52.3
20	1.25A-20PWS	23.75	26.35	28.55		1.25A-40PWS	48.75	51.35	53.55
21	1.25A-21PWS	25	27.6	29.8					
22	1.25A-22PWS	26.25	28.85	31.05					
23	1.25A-23PWS	27.5	30.1	32.3					

4									
3									
2	130-0100-003	端子 Contact	磷青铜 Phosphor Bronze	nx1	电镀(铜): 整个表面镀底镍30u"MIN,再镀铜 80u"MIN.				
1	130-0300-001	基座 Housing	PA46(UL94V-0)	1	枪				
序号	图号	名称	材料	数量	附注				
未注公差			HDC 有限公司						
X.° ±3° X.X° ±0.5°									
<10	10-30	>30	单位	比例	Design Units	SIZE	页码		
±0.2	±0.25	±0.3	MM Only	—	METRIC	A4	1 OF 1		
制作	审核	批准	材料	图号	130-1000-022	Part No	F125010-**-6**		
胡海针	洪新江	H.DR	见图解	品名	1.25A-nPWS				

旧底图总号  
底图总号  
签字  
日期