

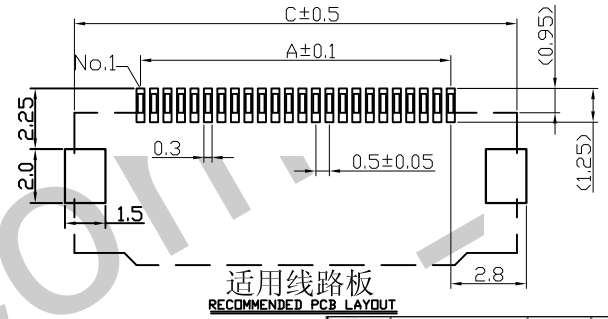

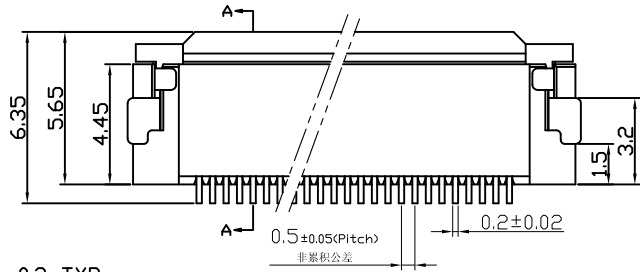
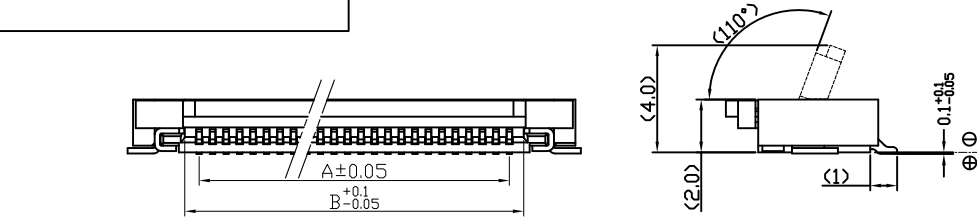
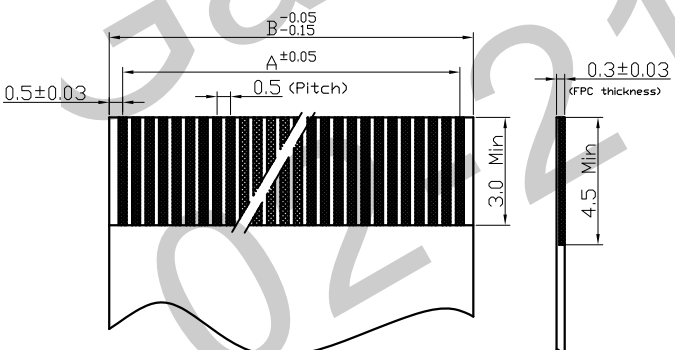
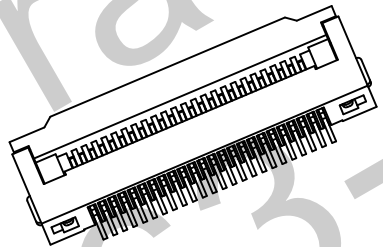


0.5-12承认图面

REV.	DESCRIPTION	DATE
A/0	原始版本	2011.5.16

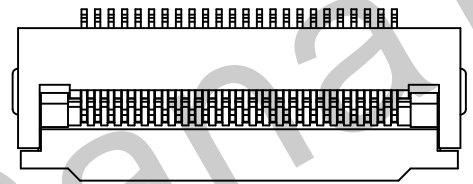

适用线路板
RECOMMENDED PCB LAYOUT

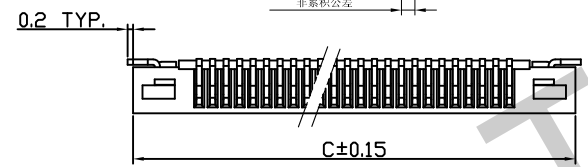

适用FPC寸法
APPLICABLE FPC

- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: -25° C~85° C;
 - 3、额定电压: 50V, AC, DC(等效);
 - 4、接触电阻: ≤0.03Ω;
 - 5、绝缘电阻: ≥500MΩ;
 - 6、耐压: 500V, AC/minute.

- ROHS管理规定:
- 1、禁止使用含有ROHS指令所限制的物质。
 - 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 有效期一年。

Pin/位	Type	A	B	C
	0.5-12-33PBX	16	17.1	21.4
	0.5-12-34PBX	16.5	17.6	21.9
	0.5-12-35PBX	17	18.1	22.4
	0.5-12-36PBX	17.5	18.6	22.9
	0.5-12-37PBX	18	19.1	23.4
	0.5-12-38PBX	18.5	19.6	23.9
	0.5-12-39PBX	19	20.1	24.4
40	0.5-12-40PBX	19.5	20.6	24.9
	0.5-12-41PBX	20	21.1	25.4
	0.5-12-42PBX	20.5	21.6	25.9
	0.5-12-43PBX	21	22.1	26.4
	0.5-12-44PBX	21.5	22.6	26.9
45	0.5-12-45PBX	22	23.1	27.4
	0.5-12-46PBX	22.5	23.6	27.9
	0.5-12-47PBX	23	24.1	28.4
	0.5-12-48PBX	23.5	24.6	28.9
	0.5-12-49PBX	24	25.1	29.4
50	0.5-12-50PBX	24.5	25.6	29.9
	0.5-12-51PBX	25	26.1	30.4
	0.5-12-52PBX	25.5	26.6	30.9
	0.5-12-53PBX	26	27.1	31.4
	0.5-12-54PBX	26.5	27.6	31.9
	0.5-12-55PBX	27	28.1	32.4
	0.5-12-56PBX	27.5	28.6	32.9
	0.5-12-57PBX	28	29.1	33.4
	0.5-12-58PBX	28.5	29.6	33.9
60	0.5-12-60PBX	29.5	30.6	34.9
	0.5-12-64PBX	31.5	32.6	36.9

4	184-0200-004	弹片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(镍): 整个表面镀层30u"MIN, 厚度 80u"MIN.			
3	184-0400-003	异物 Actuator	PPS(UL94V-0)	1	黑色/棕色			
2	184-0100-002	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(镍): 整个表面镀层30u"MIN, 厚度 80u"MIN.			
1	184-0300-001	基座 Housing	LCP/PA46(UL94V-0)	1	本色			
序号	图号	名称	材料	数量	附注			
未注公差			HDC 有限公司					
X.° ±3° X.X° ±0.5°								
<10	10-30	>30	单位	比例	Design Units	SIZE	页码	
±0.2	±0.25	±0.3	MM Only	---	METRIC	A4	1 OF 1	
制作	审核	批准	材料	图号	184-1000-022	Part No	F050110-**-1**	
李田忠	洪新江	H.DR	见图解	品名	0.5-12-nPBX			

旧底图总号
底图总号
签字
日期