

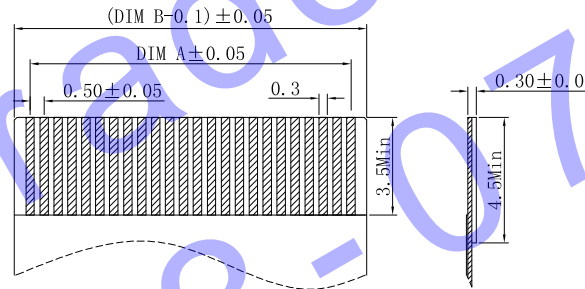
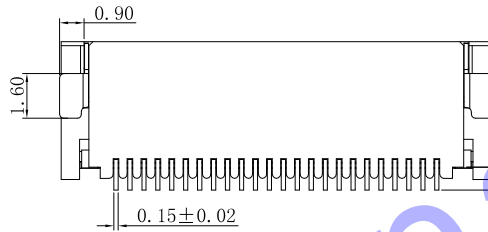


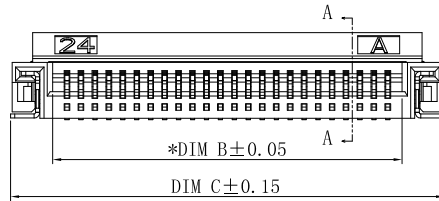
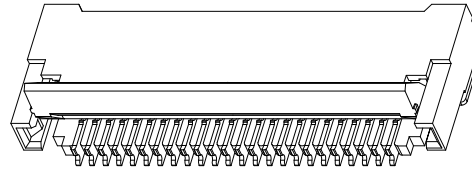


REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	09/01-22	LJS

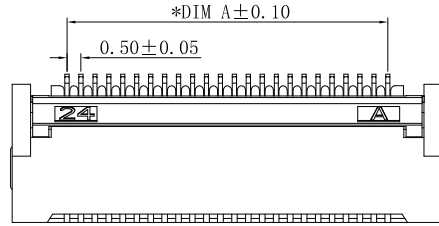

适用扁平线 (Applicable Flat Cable)

PIN	DIM A	DIM B	DIM C	PIN	DIM A	DIM B	DIM C
4	1.50	2.52	5.54	33	16.00	17.02	20.04
5	2.00	3.02	6.04	34	16.50	17.52	20.54
6	2.50	3.52	6.54	35	17.00	18.02	21.04
7	3.00	4.02	7.04	36	17.50	18.52	21.54
8	3.50	4.52	7.54	37	18.00	19.02	22.04
9	4.00	5.02	8.04	38	18.50	19.52	22.54
10	4.50	5.52	8.54	39	19.00	20.02	23.04
11	5.00	6.02	9.04	40	19.50	20.52	23.54
12	5.50	6.52	9.54	41	20.00	21.02	24.04
13	6.00	7.02	10.04	42	20.50	21.52	24.54
14	6.50	7.52	10.54	43	21.00	22.02	25.04
15	7.00	8.02	11.04	44	21.50	22.52	25.54
16	7.50	8.52	11.54	45	22.00	23.02	26.04
17	8.00	9.02	12.04	46	22.50	23.52	26.54
18	8.50	9.52	12.54	47	23.00	24.02	27.04
19	9.00	10.02	13.04	48	23.50	24.52	27.54
20	9.50	10.52	13.54	49	24.00	25.02	28.04
21	10.00	11.02	14.04	50	24.50	25.52	28.54
22	10.50	11.52	14.54	51	25.00	26.02	29.04
23	11.00	12.02	15.04	52	25.50	26.52	29.54
24	11.50	12.52	15.54	53	26.00	27.02	30.04
25	12.00	13.02	16.04	54	26.50	27.52	30.54
26	12.50	13.52	16.54	55	27.00	28.02	31.04
27	13.00	14.02	17.04	56	27.50	28.52	31.54
28	13.50	14.52	17.54	57	28.00	29.02	32.04
29	14.00	15.02	18.04	58	28.50	29.52	32.54
30	14.50	15.52	18.54	59	29.00	30.02	33.04
31	15.00	16.02	19.04	60	29.50	30.52	33.54
32	15.50	16.52	19.54				

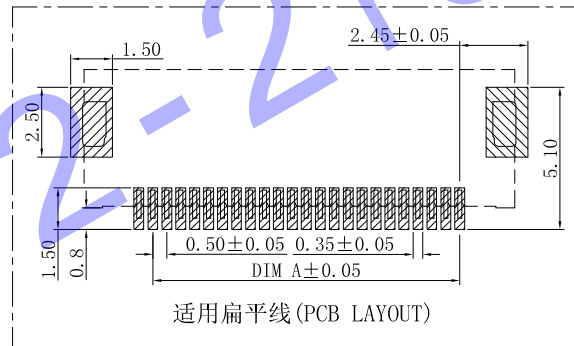


适用扁平线 (PCB LAYOUT)

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

- 规范
Specifications
- 工作温度: -25 ~ +85°C
Temperature Range: -25 ~ +85 °C
 - 额定电压: 50v AC, DC
Rated voltage: 50 V AC, DC
 - 额定电流: 0.5 A 交流、直流
Rated current: 0.5 A AC, DC
 - 接触电阻: 30mΩ Max
Contact resistance: 30m Ω Max
 - 绝缘电阻: 500MΩ Min
Insulation Resistance: 500 MΩ Min
 - 电压: 200V AC / 分钟
voltage: 200 V AC / minute
 - 外壳: LCP, UL94V-0, 贝吉色,
Shell: LCP, UL94V-0, Natural
后盖: LCP, UL94V-0 黑色
Backflip Type Actuator :LCP Black
 - 接触材质: 磷青铜; 焊片: 磷青铜
Contact Material: Phosphor bronze;
Solder pieces: Phosphor bronze
 - 电镀: 接触区域镀金, 其他区域镀锡80u" 镍底30-60u"
Plating: Gold plating in contact area, tin plating in other areas 80U "nickel bottom 30-60U"
 - 标有"*"符号为主要尺寸
Marked "*" symbol are major dimensions
 - 包装: 1500PCS/卷装
Packing: 1500PCS/Reel:

Ordering Information

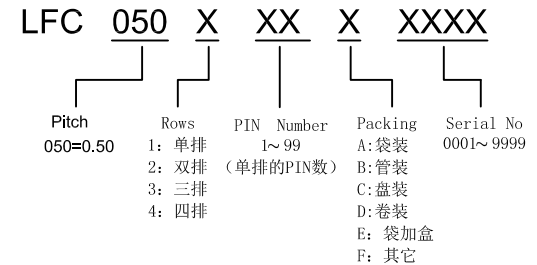

H D C 有限公司									
TITLE		FPC-W PH0.5 H2.0 40P 前插 后扣式			DRAWN BY		LJS		09/01-22
PART NO.		LFC050140DXXXX			CHECKED BY				
DRAWING NO.		—			APPROVED BY				
SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A4	