
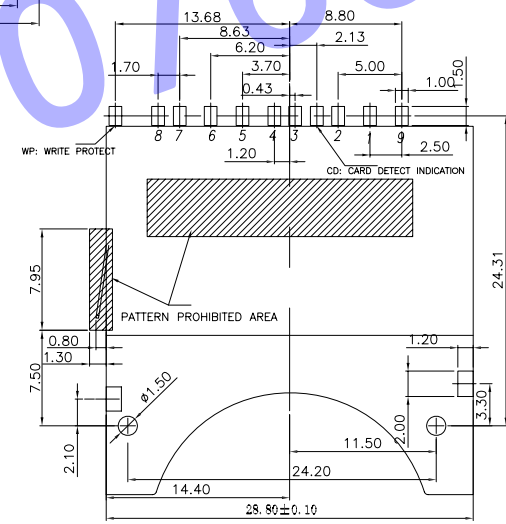


- NOTES :
- MATERIAL :
 - HOUSING:LCP UL94 V-0, BLACK COLOR.
 - SHELL: Stainless Steel.
 - CONTACT: Copper alloy.
 - FINISH :
 - CONTACT: GOLD PLATING ON CONTACT AREA, MATTE TIN 100u"MIN ON SOLDERTAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
 - SHELL: 30u" MIN NICKEL PLATING OVERALL. Au 1u"MIN ON SOLDERTAIL AREA.
 - Electrical Characteristics:
 - Operating voltage : 100V AC(rms)/DC.
 - Current rating : 0.5 A.
 - Operating Temperature: -25°C~+85°C.
 - Contact resistance: 100 m ohms max.
 - Insulation resistance: 1000M ohms min. at 250VDC.
 - Dielectric withstanding voltage:500 VAC/1minute.

PART.NO.: TW10-AP401-**

- 42: 功能区镀金1U", 锡脚镀锡纯锡至少100U"
- 43: 功能区镀金3U", 锡脚镀锡纯锡至少100U"
- 44: 功能区镀金5U", 锡脚镀锡纯锡至少100U"
- 45: 功能区镀金10U", 锡脚镀锡纯锡至少100U"
- 46: 功能区镀金15U", 锡脚镀锡纯锡至少100U"
- 47: 功能区镀金30U", 锡脚镀锡纯锡至少100U"

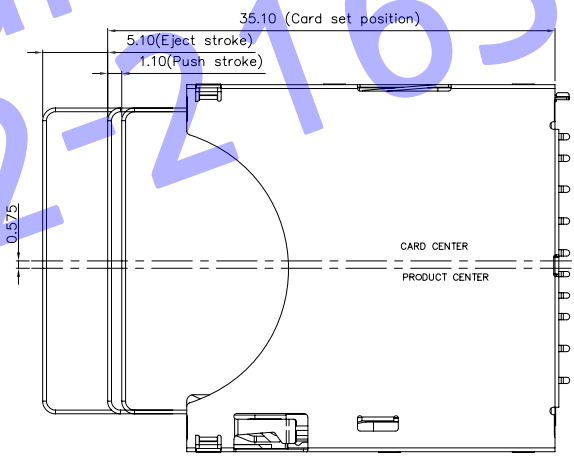

Pin No.		SD	MMC
P1	MMC-DAT3 SD-CD/DAT3	1P	1P
P2	MMC-CMD SD-CMD	2P	2P
P3	MMC-VSS1 SD-VSS1	3P	3P
P4	MMC-VDD SD-VDD	4P	4P
P5	MMC-CLK SD-CLK	5P	5P
P6	MMC-VSS2 SD-VSS2	6P	6P
P7	MMC-DAT0 SD-DAT0	7P	7P
P8	SD-DAT1	8P	
P9	SD-DAT2	9P	

CIRCUIT:		WP		GROUND	
WP	GROUND	WP	GROUND	WP	GROUND
CD	#3	CD	#3	CD	#3
WITHOUT CARD		CARD-INSERTED WRITE PROTECT : LOCK		CARD-INSERTED WRITE PROTECT : UNLOCK	

GENERAL	TOLERANCE	DWG.NO.	TW10-AP401-00	PART.NO.	TW10-AP401-**	DRAWN	zgm 2009.08.20	UNIT	mm	SCALE	NO SCALE
x.±0.50	x. °±5°	REV.	A	TITLE	SD Push Push conn. (带锁型)	CHECKED		<h1>HDC有限公司</h1>			
.x±0.25	.x °±2°	SIZE		SHEET	1 OF 1	APPROVED					
.xx±0.15	.xx °±1°	A4									