



P.C.B
LAYOUT
VIEW

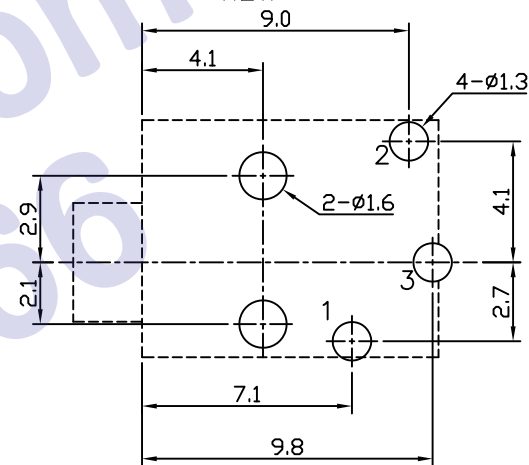

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. Life test: 5,000 cycles.

5	HOUSING	1	PA66	
4	AXIS SUPPORT	1	BRASS	Ni-Plating
3	CURVE PIECE	1	BRASS	Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM		TYPE:		MODEL NO:
		PHONE JACK		PJ-2003A
		PAPER NO:		PAGE 1 OF 1
		TOLERANCE		ANGLES
		SCALE		VER
		±0.15		±1.5°
		4:1		1
DESIGNER			HDC有限公司	
BY:				
CHECK				
APPROVED				
BY:				