
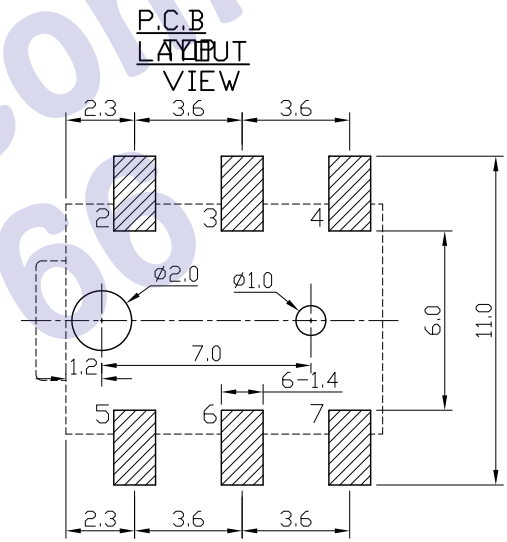


**SCHEMATIC**



**SPECIFICATION**  
 1. Rating ? DC 30V 0.5A?  
 2. Contact resistance <math>\le 0.03</math> ?  
 3. Insulation resistance <math>\ge 100M</math>? (DC250V)?  
 4. Withstand voltage <math>\ge 500VAC</math> ?  
 5. Insertion and extraction force <math>\le 2N</math>?  
 6. life test <math>\ge 5,000</math> cycles

7	FLAT SUPPORT	1	PHOSPHOR BRONZE	Au-Plating
6	CONTACT FOOT	1	Be-Cu T=0.2	Au-Plating
5	CONTACT FOOT	1	Be-Cu T=0.2	Au-Plating
4	SPRING PIECE	1	Be-Cu T=0.2	Au-Plating
3	CURVE PIECE	1	PHOSPHOR BRONZE	Au-Plating
2	CONTACT FOOT	1	Be-Cu T=0.2	Au-Plating
1	HOUSING	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT:MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1
	PHONE JACK	PJ-2020A	TOLERANCE:	SCALE
			±0.15	±1.5°
			3:1	1

DESIGNER: \_\_\_\_\_  
 BY: \_\_\_\_\_  
 CHECK: \_\_\_\_\_  
 BY: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_  
 BY: \_\_\_\_\_

**HDC有限公司**