修正标记 REV. LTR.	描述 DESCRIPTION	签 名 SIGN	日 期 DATE
	Update drawing	Zhangxiuke	2011.5.16
1	Show mating plug	Matt	2012.12.03

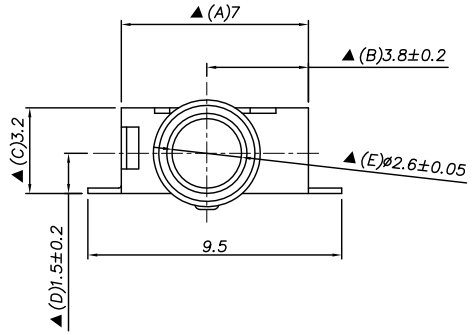

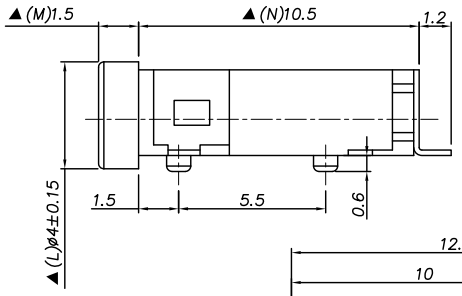

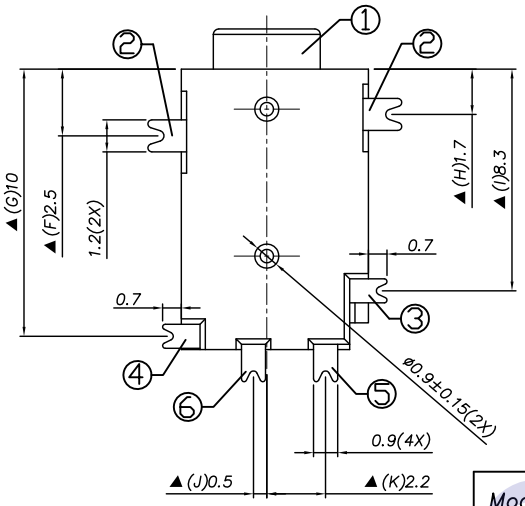

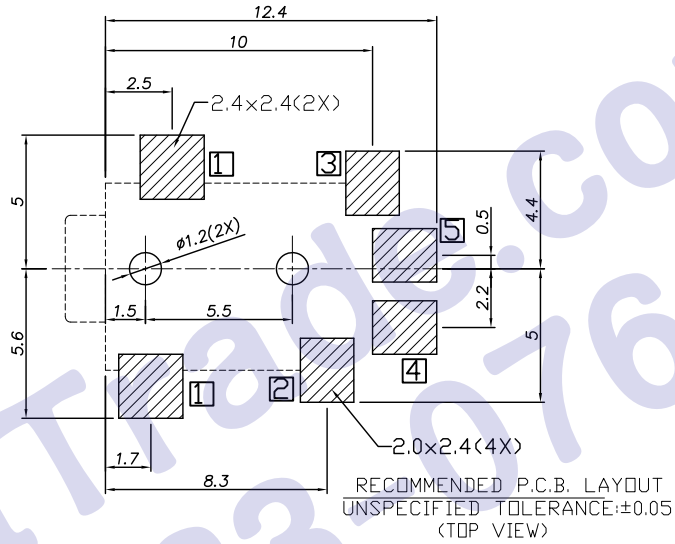

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

Model No.	PJ20230-A (PJ-223)	PJ20230-B (PJ-223-2)	PJ20230-D (PJ-223-3)	PJ20230-F (PJ-223-1)
Schematic				

□: Terminal No.

Ordering information:
PJ20230□-□□ □□ □□ S 00 1
(1) (2) (3) (4) (5) (6)(7)
(1):Series No.
(2):Schematic option:A?B?D?F
(3):Material of housing:
9T=PA9T LC=LCP
(4):Housing color:
Zero → 0A=Black(426C) 2L=Pink(701C)
3C=□range(157C) 4I=Yellow(108U)
5G=Green(577C) 6A=Blue(284C)
(5):Terminal plating
S=Silver(Au)
(6):Special option:
00=No special option
(7):Packing mode:
1=Tape reel packing

Specification:
1.Rating ?DC 30V 0.5A?
2.Contact resistance?≤30m??
After test:≤50m?
3.Insulation resistance??100M? (500VDC)?
After test:?50M?
4.Withstand voltage?500VAC ?
5.Insertion and extraction force?3N
6.life test?5000cycles min?
7.□peration temperature range:-20 ~ +70
8.Preservative temperature range:-40 ~ +85
9.Sign"? "is importance dimension

1 MATINT PLUG

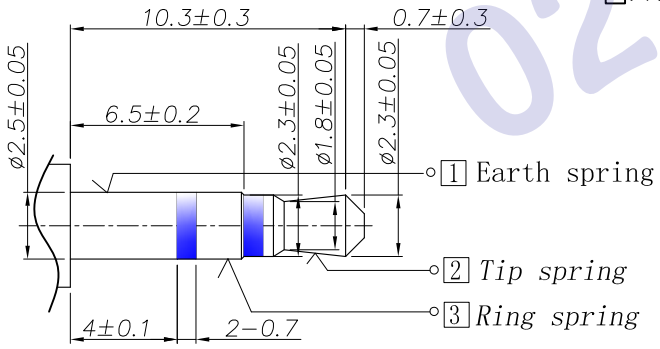

NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	REMARK
⑥	Shunt terminal 5	1	Phosphor bronze t0.2	PJ20230-06(WP-716)	Silver plating
⑤	Shunt terminal 4	1	Phosphor bronze t0.2	PJ20230-05(WP-717)	Silver plating
④	Ring spring 3	1	Stainless steel t0.2	PJ20230-03(TP-713)	Silver plating
③	Tip spring 2	1	Phosphor bronze t0.25	PJ20230-02(TP-714)	Silver plating
②	Earth terminal 1	1	Stainless steel t0.2	PJ20230-01(JA-715)	Silver plating
①	Housing	1	PA9T,UL 94V-0	PJ20230-S1(ST-712)	

UNIT:MM	TYPE:	MODEL NO.:	PAPER NO: A4		PAGE 1 OF 1	
	ø2.5 PHONE JACK	PJ20230-_ _ _ _ _S001	TOLERANCE ±0.3	ANGLES ±2°	SCALE FULL	VER 3

DESIGNER BY:	Zhangxiuke2011.05.17
CHECK BY:	
APPROVED BY:	

HDC有限公司

GanaTrade.com 0221-63-0766