

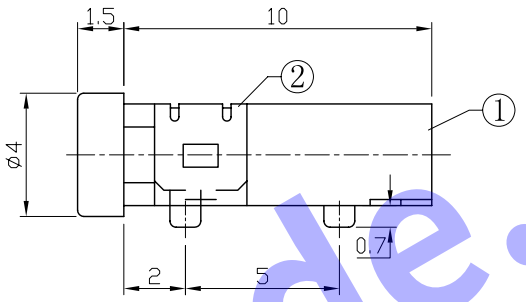

P.C.B LAYOUT
TOP VIEW

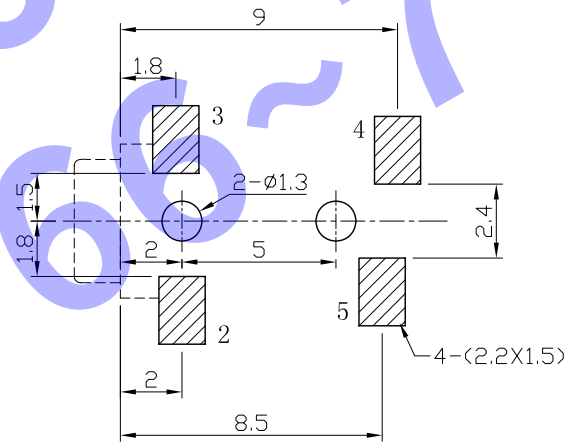

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤0.03Ω;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PPA	

UNIT: MM	TYPE:	MODEL NO: GPJJ-20340 J	PAPER NO: A4		PAGE 1 OF 1
			TOLERANCE	ANGLES	SCALE	VER
			±0.15	±1.5°	3:1	1
DESIGNER BY:		H D C 有 限 公 司			
CHECK BY:					
APPROVED BY:					

GanaTrade.com
02-2163-0766~7