

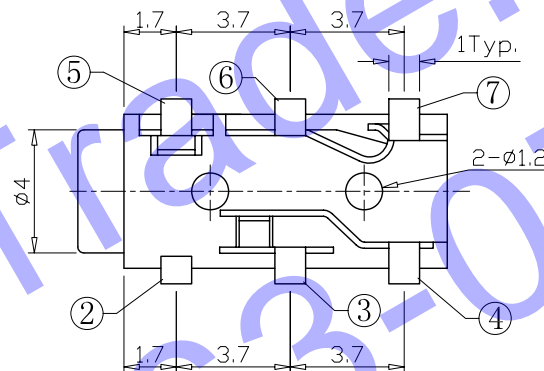


SCHMATIC

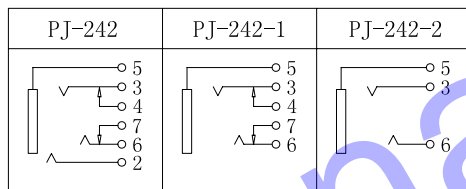

**P. C. B LAYOUT
TOP VIEW**

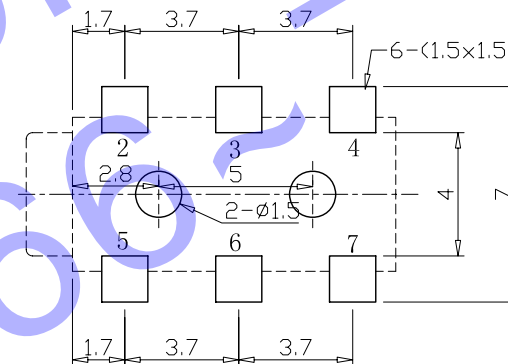

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

7	CURVE PIECE	1	BRASS	Au (Ag)-Plating
6	SPRING	1	BRONZE	Au (Ag)-Plating
5	CONTACT FOOT	1	BRONZE	Au (Ag)-Plating
4	CURVE PIECE	1	BRASS	Au (Ag)-Plating
3	SPRING	1	BRONZE	Au (Ag)-Plating
2	CONTACT FOOT	1	STAINLESS STEEL	Au (Ag)-Plating
1	HOUSING	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4		PAGE 1 OF 1	
	PHONE JACK	PJ-20420	TOLERANCE	ANGLES	SCALE	VER
			± 0.15	$\pm 1.5^\circ$	3:1	1

DESIGNER BY:		H D C 有限公司
CHECK BY:		
APPROVED BY:		