


P.C.B  
LAYOUT  
VIEW



SCHMATIC

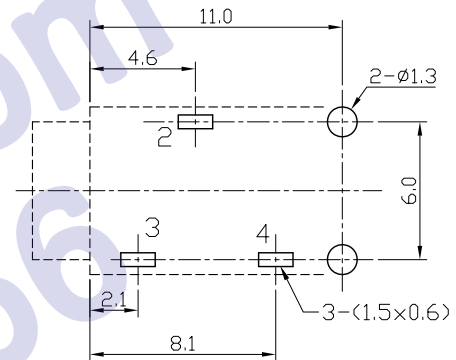

SPECIFICATION

1. Rating ? DC 30V 0.5A?
2. Contact resistance  $\leq 30m\Omega$  ?
3. Insulation resistance  $\geq 100M\Omega$  (DC250V)?
4. Withstand voltage  $\geq 500VAC$  ?
5. Insertion and extraction force  $\leq 25N$ ;
6. life test  $\geq 5,000$  cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
4	3#CONTACT	1	BRONZE	Sn-Plating
3	2#CONTACT	1	BRONZE	Sn-Plating
2	1#CONTACT	1	BRONZE	Sn-Plating
1	HOUSING	1	PBT/PC	

UNIT:MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1
	PHONE JACK	PJ3009A	TOLERANCE:	ANGLES SCALE VER
			$\pm 0.3$	$\pm 2^\circ$ 1:1 1

DESIGNER		<b>HDC有限公司</b>
CHECK		
APPROVED		
BY:		