
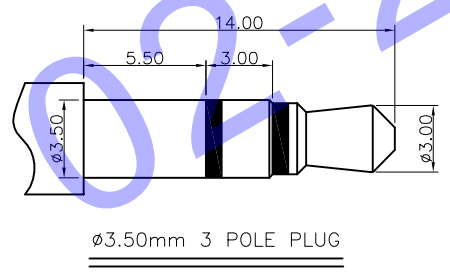


SCHMATIC

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

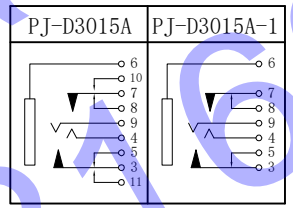

12	AXIS SUPPORT	1	BRASS	Ni-Plating
11	CONTACT FOOT	1	BRONZE	Ag-Plating
10	CONTACT FOOT	1	BRONZE	Ag-Plating
9	CONTACT FOOT	1	BRONZE	Ag-Plating
8	SPRING PIECE	1	BRONZE	Ag-Plating
7	CURVE PIECE	1	BRASS	Ag-Plating
6	CONTACT FOOT	1	BRASS	Ag-Plating
5	SPRING PIECE	1	BRONZE	Ag-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	COVER	1	PBT	
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM		TYPE:		MODEL NO:
		PHONE JACK		PJ-D3015A
DESIGNER BY:		PAPER NO: A4		PAGE 1 OF 1
CHECK BY:		TOLERANCE		ANGLES
APPROVED BY:		±0.15		±1.5°
		SCALE		VER
		3:1		1
<h1>H D C 有限公司</h1>				