



Specification:  
 1. Rating ?DC 30V 0.5A.  
 2. Contact resistance ?≤50m?.  
 After test:≤100m?  
 3. Insulation resistance ??100M? (500VDC).  
 After test: ?50M?  
 4. Withstanding voltage ?500VAC.  
 5. Insertion and extraction force ?3N?30N.  
 6. life test ?5000cycles min.  
 7. Operation temperature range ?20  
 8. Preservation temperature range ?-40  
 9. Sign? "is importance dimension.

REV. LTR.	DESCRIPTION	SIGN	DATE
△	Part No. changed	Michael	2008.06.25
△	Update drawing	Michael	2011.04.21

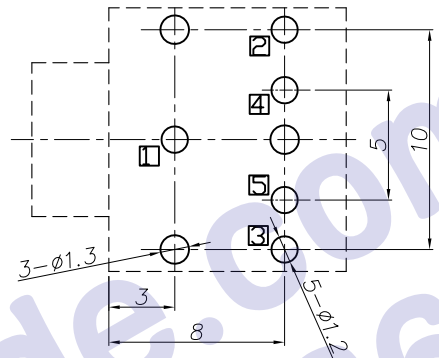

Ordering information:  
 PJ30860 L PB0A S 00 ?  
 (1) (2)(3)(4)(5)(6)(7)  
 (1):Series No.  
 (2):Schematic option: L  
 (3):Material of housing:  
 PB=PBT  
 (4):Housing color:  
 0A=Black  
 (5):Terminal plating:  
 S=Silver(Ag)  
 (6):Special option:  
 00=No special option  
 (7):Packing mode:  
 3=Plastic box packing  
 4=Bag packing

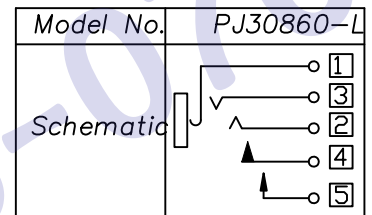

NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	REMARK
⑩	Spring No.	1	Stainless steel	PJ30060-65	Nickel plating
⑨	Bushing	1	Copper alloy	PJ30060-88	Nickel plating
⑧	Make terminal ⑤	1	Beryllium bronze t0.25	PJ30860-05	Silver plating
⑦	Transfer terminal ④	1	Stainless steel t0.2	PJ30860-04	Silver plating
⑥	Ring spring ③	1	Stainless steel t0.25	PJ30860-03	Silver plating
⑤	Tip spring ②	1	Phosphor bronze t0.25	PJ30860-02	Silver plating
④	Earth terminal ①	1	Brass t0.5	PJ30060-01	Tin plating
③	Insulator	1	PA66,UL 94HB	PJ30860-S4	
②	Cover	1	PBT,UL 94V-0	PJ30860-S2	
①	Housing	1	PBT,UL 94V-0	PJ30860-S1	

UNIT:MM	TYPE:	MODEL NO:	PAPER NO.: A4	PAGE 1 OF 1
φ	φ3.5 PHONE JACK	PJ30860-LPB0AS00	TOLERANCE	ANGLES
			±0.3	±2°
			SCALE	VER
			N/A	5

DESIGNER BY: Michael 2011.04.21  
 CHECK BY:  
 APPROVED BY:

HDC有限公司