

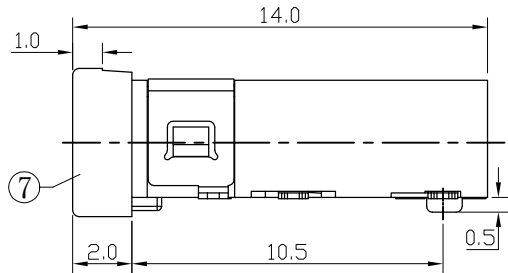


1 2 3 4 5



A

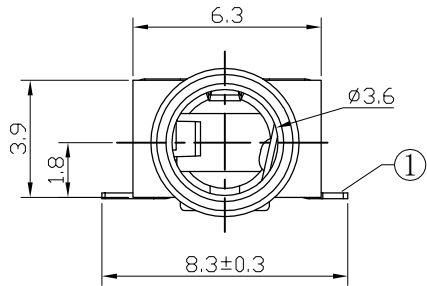

P. C. B LAYOUT
TOP VIEW

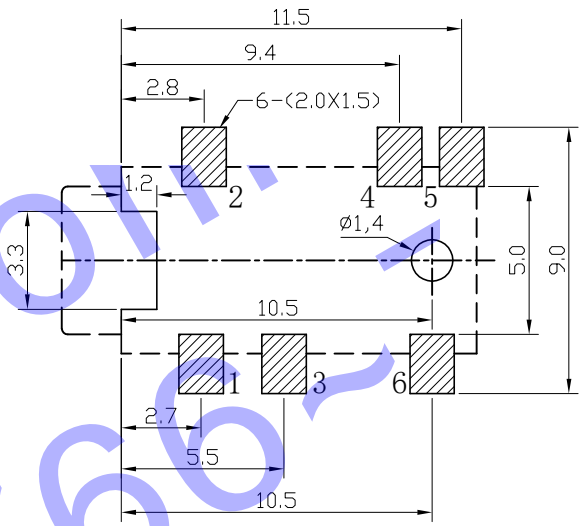

B

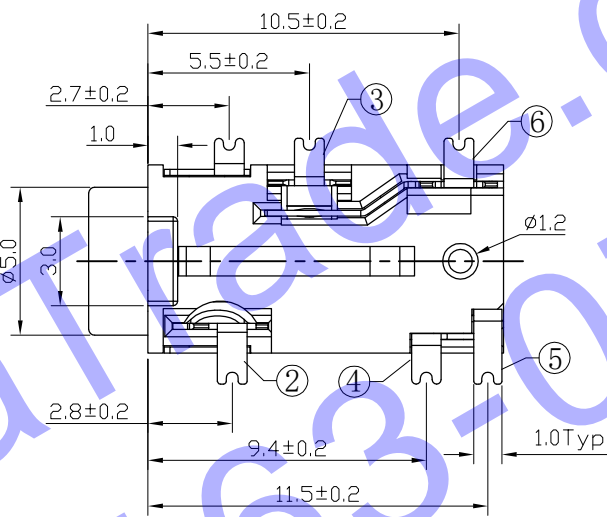


SPECIFICATION

- 1. Rating : DC 30V 0.5A;
- 2. Contact resistance: ≤0.03 Ω;
- 3. Insulation resistance: ≥100M Ω (DC250V);
- 4. Withstand voltage: 500VAC ;
- 5. Insertion and extraction force: 3-20N;
- 6. life test: 5,000 cycles.

C

SCHEMATIC

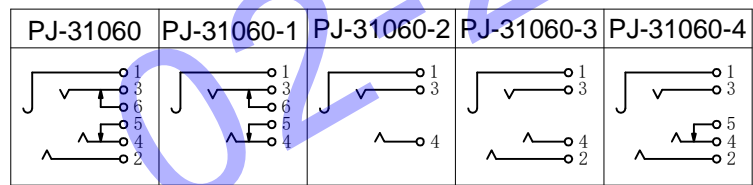

D

7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	BRONZE	Au-Plating
5	5# CONTACT FOOT	1	BRONZE	Au-Plating
4	4# CONTACT FOOT	1	BRONZE	Au-Plating
3	3# CONTACT FOOT	1	BRONZE	Au-Plating
2	2# CONTACT FOOT	1	BRONZE	Au-Plating
1	1# CONTACT FOOT	1	BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

E

UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1	
	PHONE JACK	PJ-31060	TOLERANCE	ANGLES	SCALE
			±0.15	±1.5°	4:1
				VER	0

DESIGNER BY: _____
 CHECK BY: _____
 APPROVED BY: _____

H D C 有限公司

1 2 3 4 5