

NOTES:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :15 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :1000 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC STRENGTH :1000V AC RMS 50Hz. 1MIN.


MECHANICAL:

- 1.HOUSING MATERIAL :LEAD FREE POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm FLAT PIN
- 3.PLATING :60LD PLATING OVER NICKEL.
- 4.OPERATING :750 CYCLES MIN.
- 5.SHIELDING :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- 6.PCB RETENTION PRE-SOLDER :1 LB MIN.


ENVIRONMENTAL:

- 1.Temperature Range : -40℃~+85℃
- 2.Relative Humidity : 90~95% (40±2℃)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

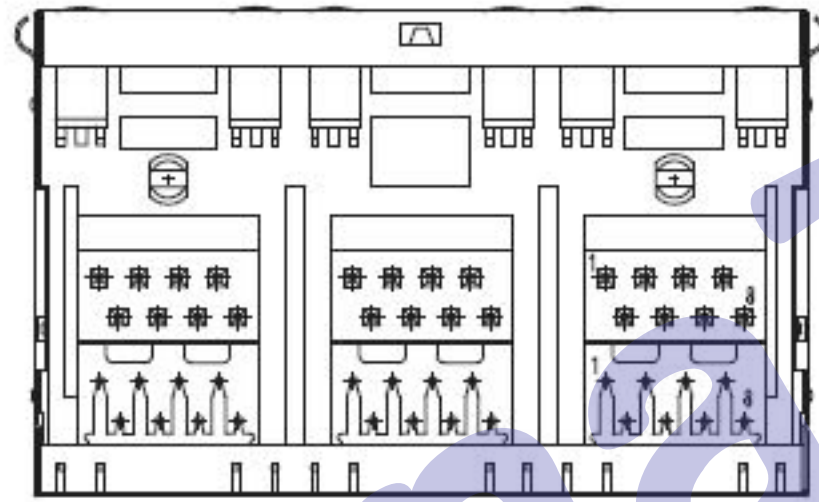

PCB LAYOUT
16,26X2=32,52

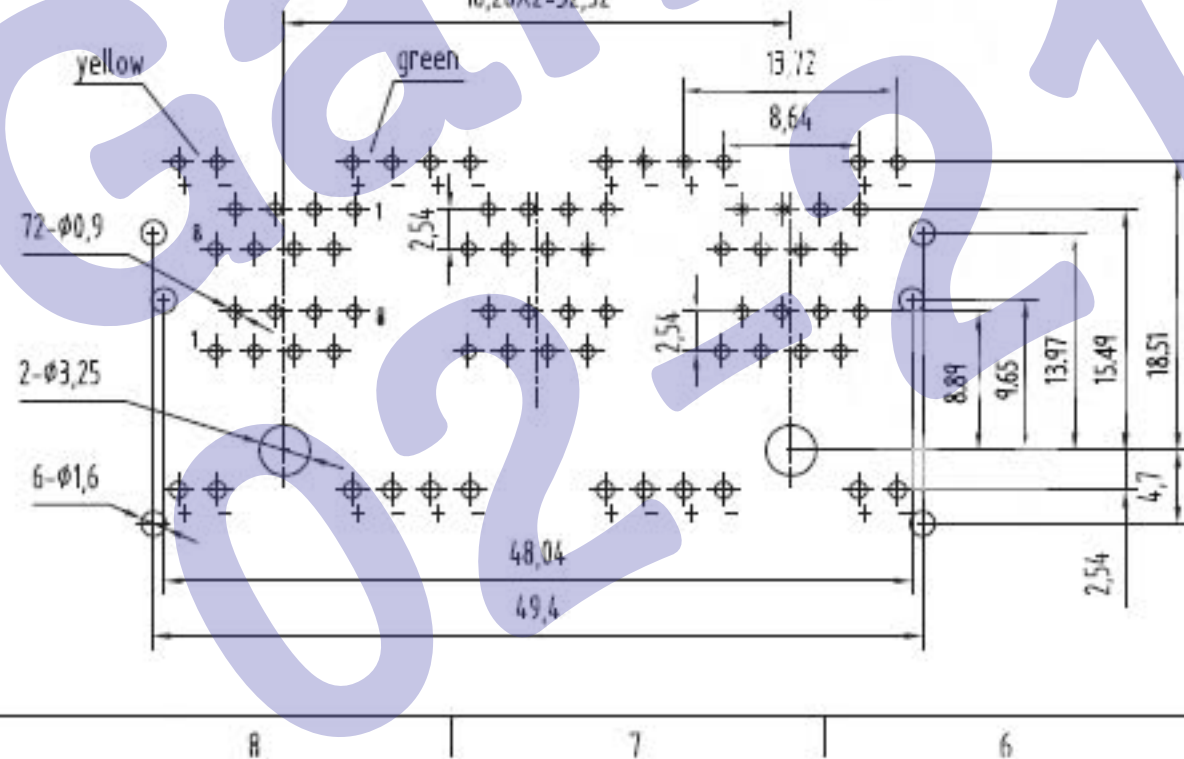

DETACHED LISTS	MM (INCH)	DFTO: XNW	DATE: 08.7.1	HDC有限公司		
	TOLERANCES EXCEPT AS NOTED	CHKD: BETTY	DATE: 08.7.1			
	MM	APPVL: PAUL	DATE: 08.7.1	2X3 SHIELDED WITH EMI WITH LED		
	.0 ± 0.20 ±	MATERIAL:		/PART NO. 59S2X3R-LED-EMI		
.00 ± 0.15 ±	QTY:		SIZE	REV	A4 A/0	
.000 ± 0.075 ±	FINISH:		DO NOT SCALE DRAWING		SHEET	1 OF 1
ANGLES ± 0.5°	SCALE : 1:1					
THIRD ANGLE PROJECTION						