

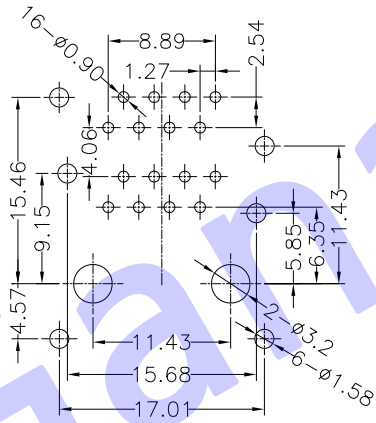
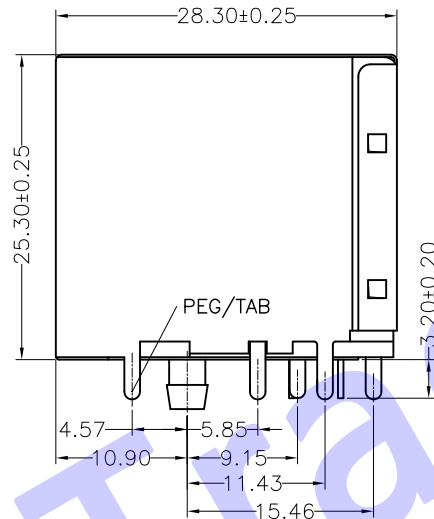


更改 REV	设计内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图面发行	2011/8/29	Oscar	Oscar

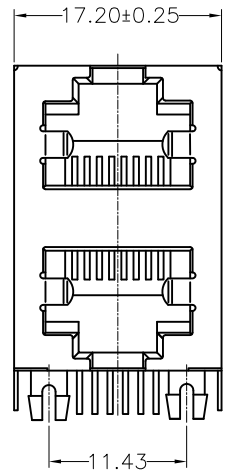

PC Board Layout

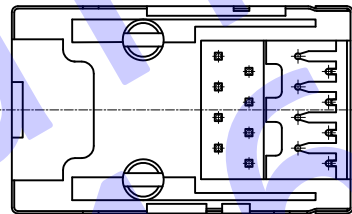

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE ϕ 0.46mm (C5100).

- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.SHIELD: COPPER ALLOY 0.20mm THICKNESS PLATING NI.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE :-40°C TO +85°C.
- 2. OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

PART NUMBER:

8801-31A8810XXX

88 SERIES:
(2XN JACK)
Product Style:
01-# 间距 Pitch=13.97mm 间距
Shield Style:
1-W/O Shield 2-Half Shield 半壳
3-不带壳 4-无上壳 5-全部壳 6-上,全部壳
7-上壳壳,全部壳 8-上壳,全部壳
PIN STYPES :
1-脚
2-脚
PORTS:
A - 2X1 PORT B - 2X2 PORTS
C - 2X4 PORTS D - 2X6 PORTS
E - 2X8 PORTS
Positions:
6-6P 8-8P 0-10P
Contacts:
6-6C 8-8C
PEG/TAB & BACK PEG (透脚脚&后壳脚)
0-W/O PEG 1-脚脚 4.57 无透脚脚
2-脚脚 4.70 无透脚脚

Gold plating u"
1-Fu" 2-2u" 3-3u" 4-6u"
5-15" 6-30u" 7-50u"

Logo&PcbType:
0-不放
1-W
2-W

Plastics Material&Color:
1-PBT+20%GF Black
2-PA46 Black

LED Style:
0-W/O LED
1-L Led:Green R Led:Yellow
2-L Led:Yellow R Led:Green
3-L Led:Green&Orange R Led:Yellow
4-L Led:Green&Red R Led:Yellow
5-L Led:Green&Yellow R Led:Yellow
6-L Led:Red R Led:Green

②② : Inspection Item ③③ : Cp/Cpk and SPC Control Item ④④ : APPROVE ⑤⑤ : CHECK	DIMENSION IN mm [Inch]		HDC 有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		专案号 FILE NO.	图号 DWG NO. 8801-8P-002
	.X±0.20	X.°±1°	名称 TITLE 2x1 W/O LED JACK (Pitch=13.97mm)	
	.XX±0.15	.X°±0.5°		
	.XXX±0.075			
核准 APPROVE Oscar	审核 CHECK JDL	制图 DRAW Oscar	画法 PROJ. 比例 SCALE 1:1	图纸 SIZE A3
		页数 SHEET 1	更改 REV 1 / A	