


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图面发行	2011/8/29	Oscar	Oscar

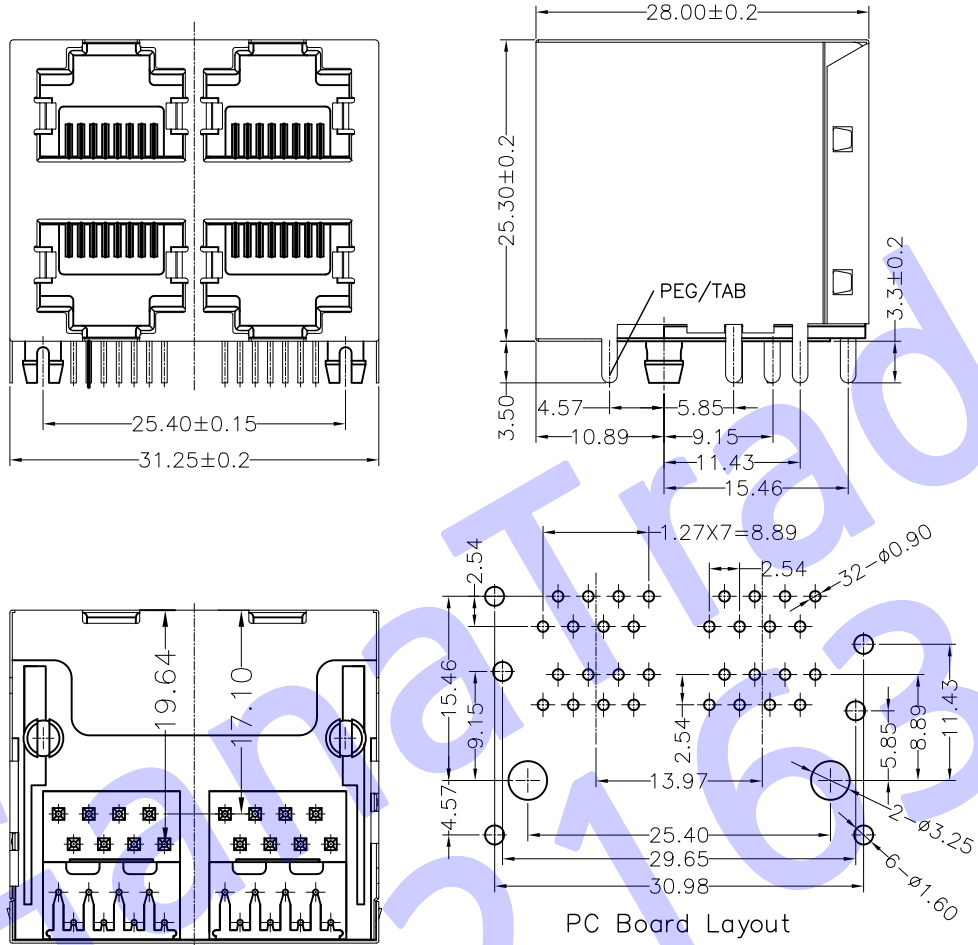

NOTES:

MATERIAL:

- HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
- CONTACT MATERIAL :PHOSPHOR BRONZE ∅0.46mm (C5100).
- PLATING :GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY 0.20mm THICKNESS PLATING NI.

ELECTRICAL:

- VOLTAGE RATING :125 VAC RMS.
- CURRENT RATING :1.5 AMP.
- CONTACT RESISTANCE :50 MILLIOHMS MAX.
- INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- DURRABILITY :750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION : 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68,SUBPART F.

PART NUMBER:
8801-31B8810XXX

- 88 SERIES:**
(2XN JACK)
- Product Style:
01- 2X2 Pitch=13.97mm
- Shield Style:
1-W/O Shield 2-Half Shield
3-上屏蔽 4-无上屏蔽 5-左屏蔽 6-上、左屏蔽
7-上屏蔽、右屏蔽 8-上屏蔽、右屏蔽
- PIN STYPES :
1- 1脚
2- 2脚
- PORTS:
A - 2X1 PORT B - 2X2 PORTS
C - 2X4 PORTS E - 2X6 PORTS
D - 2X8 PORTS
- Positions:
6-6P 8-8P 0-10P
- Contacts:
6-6C 8-8C
- PEG/TAB & BACK (选做脚及后做脚)
0-W/O PEG 1-脚长4.57 无后做脚
2-脚长4.70 无后做脚
- Gold plating u"
1-Fu" 2-2u" 3-3u" 4-6u"
5-15" 6-30u" 7-50u"
- Logo&PcbType:
0-无脚
1-W/HXAN LOGO
2-W/HAXN&ULLOGO
- Plastics Material&Color:
1-PBT+20%GF Black
2-PA46 Black
- LED Style:
0-W/O LED
1-L Led:Green R Led:Yellow
2-L Led:Yellow R Led:Green
3-L Led:Green&Orange R Led:Yellow
4-L Led:Green&Red R Led:Yellow
5-L Led:Green&Yellow R Led:Yellow
6-L Led:Red R Led:Green

◎◎ : Inspection Item ◎P : Cp/Cpk and SPC Control Item ◎PK	DIMENSION IN mm [Inch]		HDC有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		专案号 FILE NO.	图号 DWG NO. 8801-8P-004
	.X± 0.20	X°± 1°	名称 TITLE 2x2 W/O LED JACK (Pitch=13.97mm)	
	.XX± 0.15	.X°± 0.5°		
	.XXX± 0.075		核准 APPROVE Oscar	审核 CHECK JDL
比例 SCALE 1:1		图幅 SHEET A3	页次 1 / 1	更改 REV A