






1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW	APPROVE
A	圖面發行	2011/8/29	Oscar	Oscar


NOTES:
MATERIAL:
 1. HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
 2. CONTACT MATERIAL :PHOSPHOR BRONZE #0.46mm (C5100).
 3. PLATING :GOLD PLATING OVER NICKEL.
 4. SHIELD: COPPER ALLOY 0.20mm THICKNESS PLATING NI.
ELECTRICAL:
 1. VOLTAGE RATING :125 VAC RMS.
 2. CURRENT RATING :1.5 AMP.
 3. CONTACT RESISTANCE :50 MILLIOHMS MAX.
 4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
MECHANICAL:
 1. DURRABILITY :750 CYCLES MIN.
 2. PCB RETENTION PRE-SOLDER :1 LB MIN.
ENVIRONMENTAL:
 1. STORAGE : -40°C TO +85°C.
 2. OPERATION : 0°C TO 70°C.
 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER:
 8801-21C8810XXX

B8 SERIES (2XN JACK)
 Product Style:
 01- Pitch=13.97mm
 Shield Style:
 1-W/O Shield 2-Half Shield
 3- 4- 5- 6- 7- 8-
 PIN TYPES:
 1- 2-
 PORTS:
 A- 2X1 PORT B- 2X2 PORTS
 C- 2X4 PORTS D- 2X8 PORTS
 E- 2X8 PORTS
 Positions:
 6-6P 8-8P 0-10P
 Contacts:
 6-6C 8-8C
 PEG/TAB & BACK PEG ()
 0-W/O PEG 1- 2-
 Gold plating u"
 1-Fu" 2-2u" 3-3u" 4-6u"
 5-15" 6-30u" 7-50u"
 Logo&PcbType:
 0-
 1-W/HXAN LOGO
 2-W/HAXN&ULLOGO
 Plastics Material&Color:
 1-PBT+20%GF Black
 2-PA46 Black
 LED Style:
 0-W/O LED
 1-L Led:Green R Led:Yellow
 2-L Led:Yellow R Led:Green
 3-L Led:Green&Orange R Led:Yellow
 4-L Led:Green&Red R Led:Yellow
 5-L Led:Green&Yellow R Led:Yellow
 6-L Led:Red R Led:Green

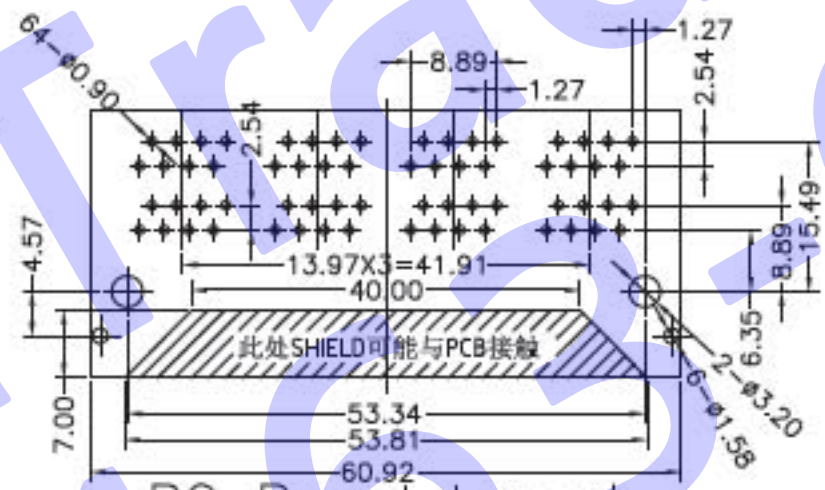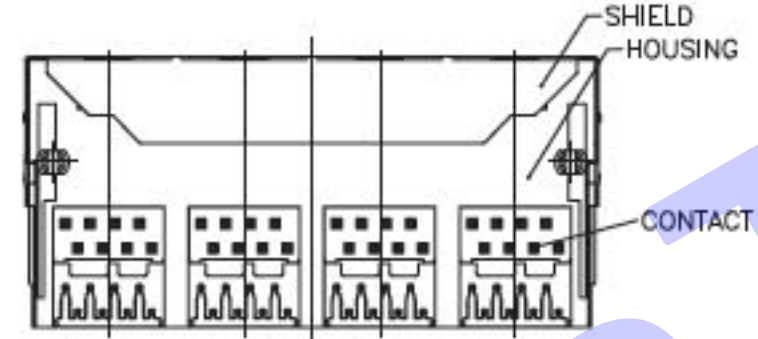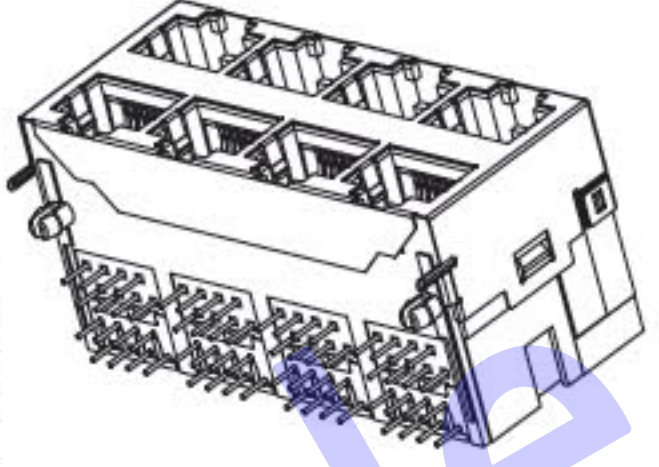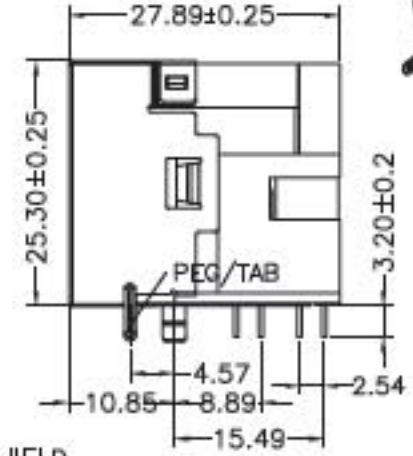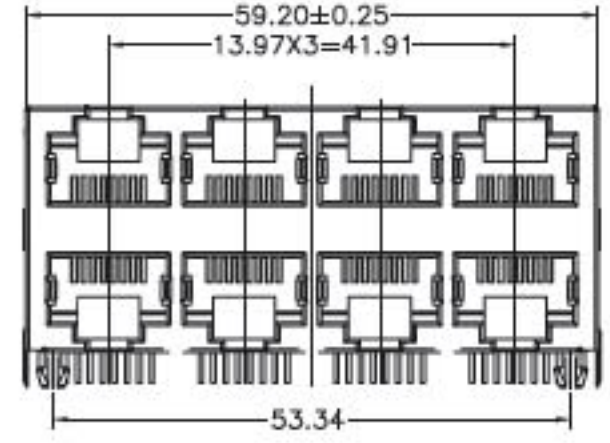

PC Board Layout

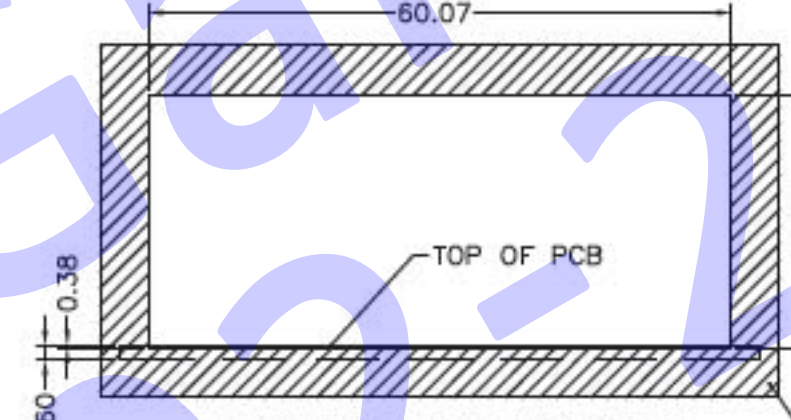

QC : Inspection Item	CPK : Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		HDC 有限公司							
		TOLERANCE UNLESS OTHERWISE SPECIFIED									
		.X± 0.20	X.*± 1"	專案號 FILE NO.	圖號 DWG NO.	8801-8P-013					
		.XX± 0.15	.X.*± 0.5"	名稱 TITLE 2x4 W/O LED JACK (Pitch=13.97mm)							
.XXX± 0.075		核准 APPROVE	審核 CHECK	繪圖 DRAW	角法 PROJ.	圖紙 SCALE	圖號 SIZE	頁數 SHEET	1 / 1	更改 REV	A
		Oscar	JDL	Oscar	1:1	A3					

1 2 3 4 5 6 7 8