
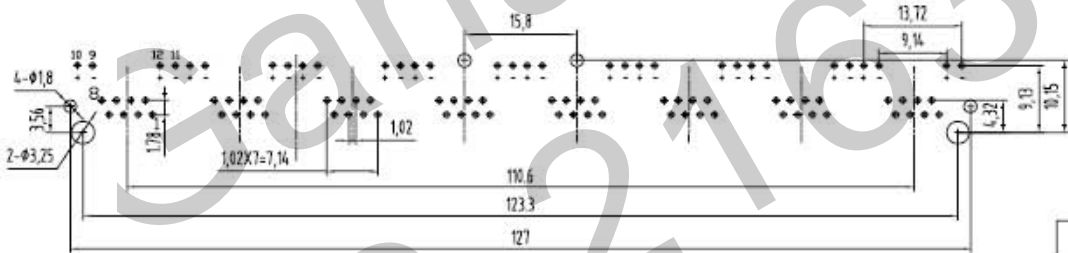

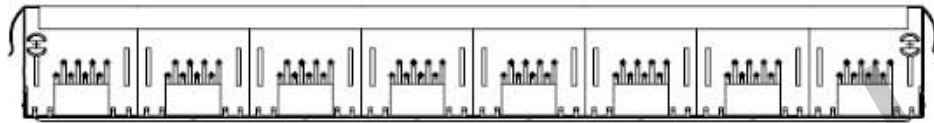


更改 REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	首次发行	2012/10/29	JDL	Oscar

NOTES:

- MATERIAL:
- HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
 - CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$ (C5100).
 - PLATING :GOLD PLATING OVER NICKEL.
 - SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - LED OPTION.
- ELECTRICAL:
- VOLTAGE RATING :125 VAC RMS.
 - CURRENT RATING :1.5 AMP.
 - CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz, 1MIN.
 - LED RATINGS:FORWARD VOLTAGE:2.2 VOLTS TYPICAL
REVERSE VOLTAGE:5 VOLTS MAXIMUM.
- MECHANICAL:
- DURRABILITY:750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER
- ENVIRONMENTAL:
- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
 - OPERATION: -20°C TO 70°C .
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

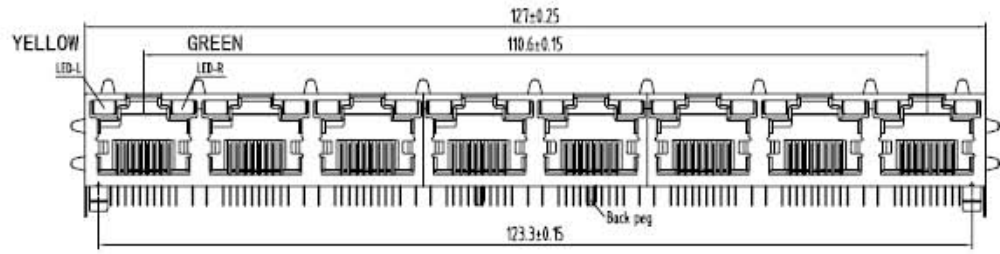

PC Board Layout



单色灯脚位图

QC : Inspection Item		HDC 有限公司	
Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]	图号 FILE NO.	料号 DWG NO. GRJJ-H7191
	TOLERANCE UNLESS OTHERWISE SPECIFIED	名称 TITLE 56A 1X8 8P@C LED PCB JACK&SHIELDED WITH EMI FINGER SIDE ENTRY,TAB-UP,ROUND PIN	
	.X± 0.20 X.*± 1"		
	.XX± 0.15 .X.*± 0.5"		
.XXX± 0.075	制图 DRAW Oscar	审核 PROJ. SCALE 1:1	数量 SHEET 1 / 1
核准 APPROVE	检查 CHECK	图幅 SIZE A3	更改 REV A