
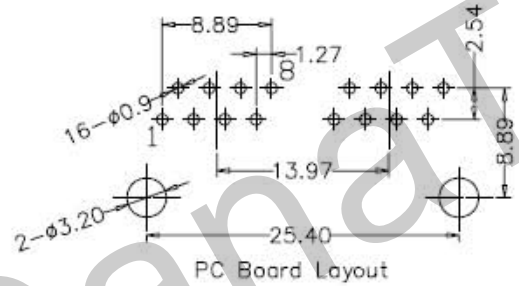


更改 REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	首版发行	2012/10/29	JDL	Oscar

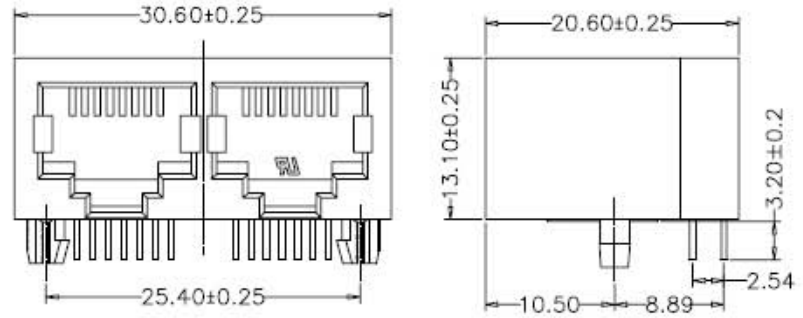

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.

**MECHANICAL:**

- HOUSING MATERIAL : NYLON+30%.G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE φ0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED:OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

- STORAGE : -40°C TO +85°C.
  - OPERATION: 0°C TO +70°C.
  - WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
  - ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

QC : Inspection Item Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		HDC 有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		文件号 FILE NO.	图号 DWG NO. GRJJ-H7199
	.X± 0.20	X."± 1"	名称 TITLE 59A 1X2 BP8C PCB JACK W/D SHIELD SIDE ENTRY,ROUND PIN	
	.XX± 0.15	.X"± 0.5"	制图 DRAW Oscar	
.XXX± 0.075		审核 APPROVE	检查 CHECK	比例 SCALE 1:1
		制图 DRAW Oscar	审核 APPROVE Oscar	图号 DWG NO. GRJJ-H7199
		比例 SCALE 1:1	图幅 SIZE A3	页次 REV 1 / A