
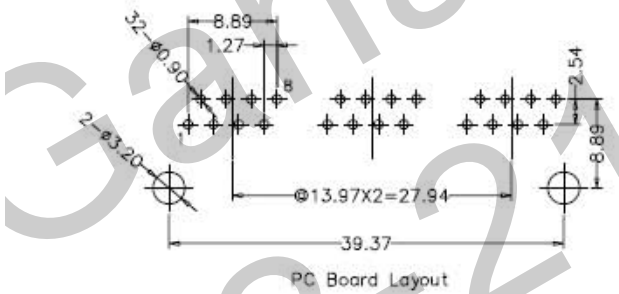


1 2 3 4 5 6 7 8

更改 REV	设计内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	图纸发行	2012/10/29	JDL	Oscar

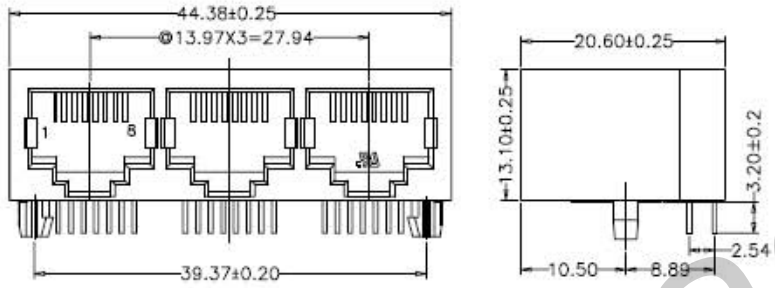

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE ø0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. SHIELD, COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- 5. LED:OPTION
- 6. OPERATING LIFE : 750 CYCLES MIN.
- 7. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 8. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: 0°C TO +70°C.
 - 3. WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
 - 4. ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

◎ : Inspection Item ◎ : Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		HDC 有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		图号 FILE NO.	图号 DWG NO.
	.X± 0.20	X.*± 1°	标题 TITLE	S9A 1X3 8P8C PCB JACK W/D SHIELD SIDE ENTRY,ROUND PIN
	.XX± 0.15	.X.*± 0.5°		
.XXX± 0.075		制图 DRAW	审核 CHECK	
制图 DRAW	审核 CHECK	比例 SCALE	图幅 SIZE	张数 SHEET
Oscar		1:1	A3	1 / 1
		更改 REV		A

1 2 3 4 5 6 7 8