


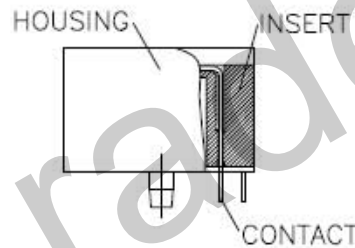


更改 REV	修改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	图纸发行	2012/10/29	JDL	Oscar

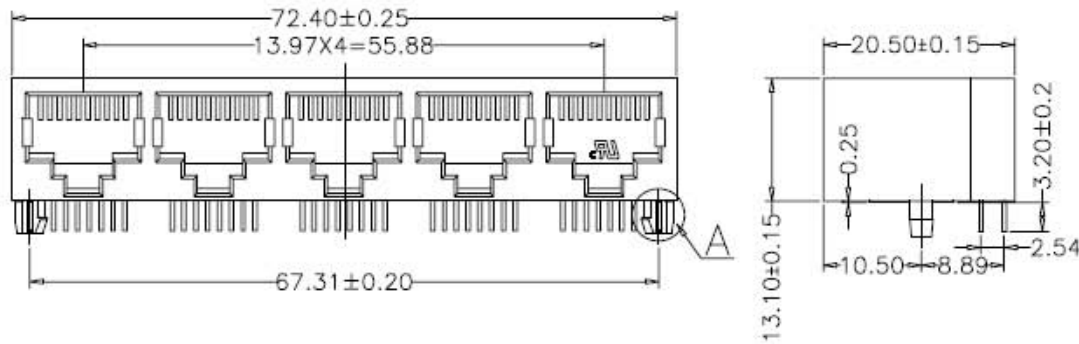

Detail A

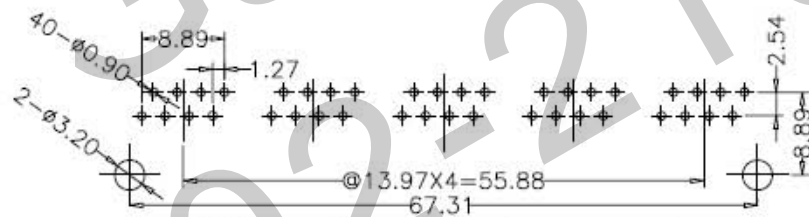

PC Board Layout

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%.G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED:OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
- ROHS COMPLIANT

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

QC : inspection item		DIMENSION IN mm [Inch]		HDC 有限公司	
Cpk/Cpk and SPC Control item	TOLERANCE UNLESS OTHERWISE SPECIFIED	文件号 FILE NO.	图号 DWG NO.	GRUJ-H7202	
	.X± 0.20	X.*± 1"	名称 TITLE		
	.XX± 0.15	.X*± 0.5"	59A 1X5 8P8C PCB JACK W/D SHIELD SIDE ENTRY,ROUND PIN		
	.XXX± 0.075		制图 DRAW		
制图 APPROVE	审核 CHECK	Oscar	比例 SCALE	1:1	图幅 SIZE
			图幅 SIZE	A3	张数 SHEET
			张数 REV	1	1
			图幅 REV	A	