



1 2 3 4 5 6 7 8

更改 REV	设计内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	图面发行	2012/10/29	JDL	Oscar

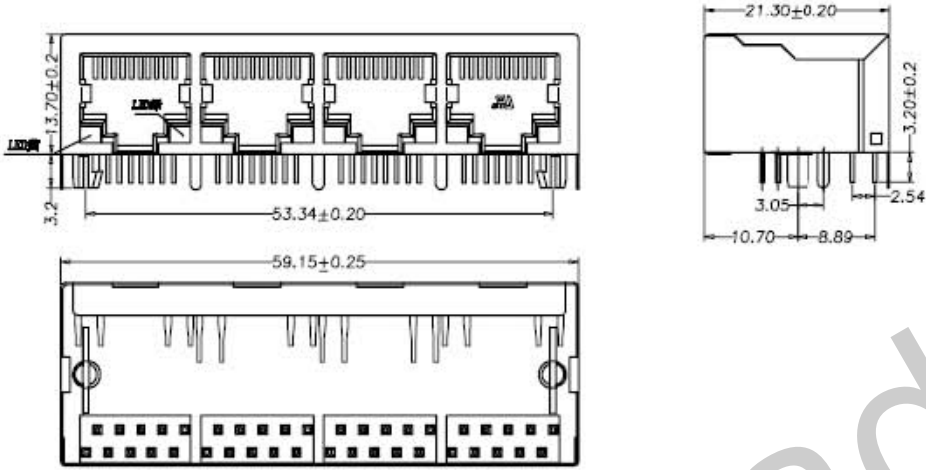


NOTES:

- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.
- MECHANICAL:**
- HOUSING MATERIAL : NYLON+30%.G.F UL94V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE ø0.46mm
 - PLATING : GOLD PLATING OVER NICKEL.
 - SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - LED:OPTION
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
 - ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

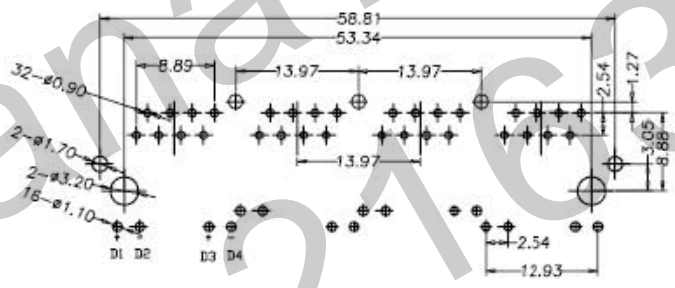

SUGGESTED PCB LAYOUT
TOP VIEW



QC : inspection item Cpk/Cpk and SPC Control item	DIMENSION IN mm [Inch]		HDC 有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		文件号 FILE NO.	图号 DWG NO. GRJ-H7215
	.X± 0.20	.X.*± 1"	名称 TITLE 59A 1X4 8P8C LED PCB JACK WITH SHIELDED SIDE ENTRY, Round PIN	
	.XX± 0.15	.X.*± 0.5"		
.XXX± 0.075		制图 DRAW Oscar	审核 PROJ. 1/1	图号 SHEET 1/1
制图 APPROVE	审核 CHECK	比例 SCALE 1:1	图幅 SIZE A3	更改 REV A

1 2 3 4 5 6 7 8