
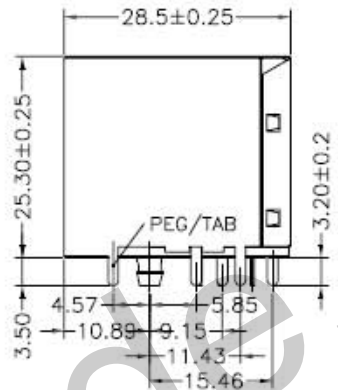




1 2 3 4 5 6 7 8

更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	图面发行	2012/10/29	JDL	Oscar

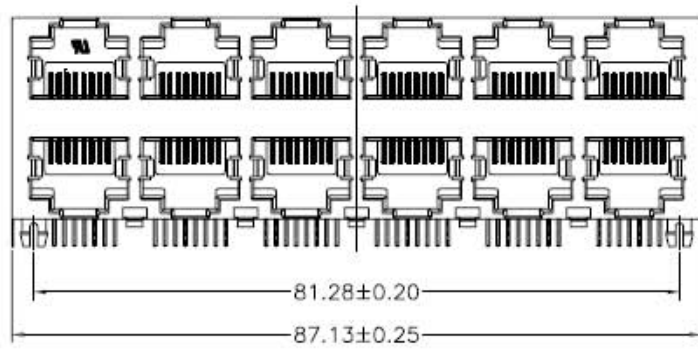

NOTES:

- MATERIAL:
- HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
 - CONTACT MATERIAL :PHOSPHOR BRONZE ϕ 0.46mm (C5100).
 - PLATING :GOLD PLATING OVER NICKEL.
 - SHIELD :COPPER ALLOY 0.20mm THICKNESS, PLATING NI.
- ELECTRICAL:
- VOLTAGE RATING :125 VAC RMS.
 - CURRENT RATING :1.5 AMP.
 - CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz, 1MIN.
- MECHANICAL:
- DURABILITY :750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:
- STORAGE : -40°C TO +85°C.
 - OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

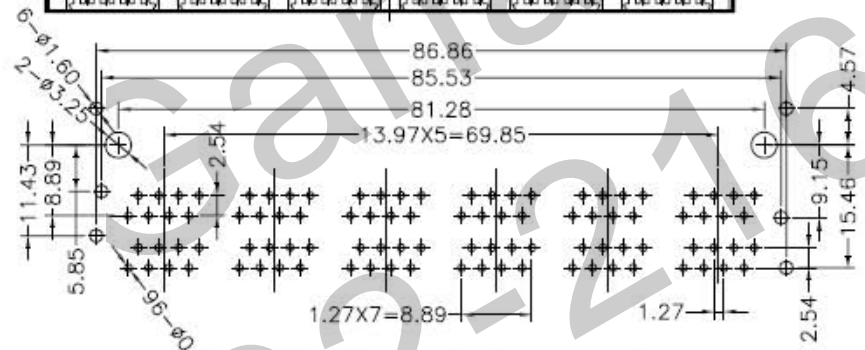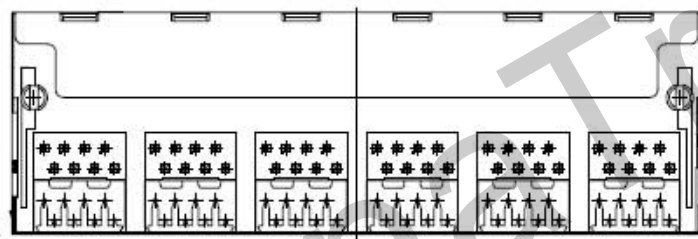

PC Board Layout

QC : Inspection Item	Cpk/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		HDC 有限公司	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		文件号 FILE NO.	图号 DWG NO.
		.X± 0.20	X.*± 1*	名称 TITLE	
		.XX± 0.15	.X*± 0.5*	59A 2X6 8P8C PCB JACK&SHIELDED W/O EMI FINGER SIDE ENTRY, ROUND PIN	
		.XXX± 0.075		制图 DRAW	审核 APPROVE
		制图 DRAW	审核 CHECK	制图 DRAW	审核 CHECK
		Oscar		比例 SCALE	图幅 SIZE
				1:1	A3
				张数 SHEET	1 / 1
				图幅 SIZE	A

1 2 3 4 5 6 7 8