
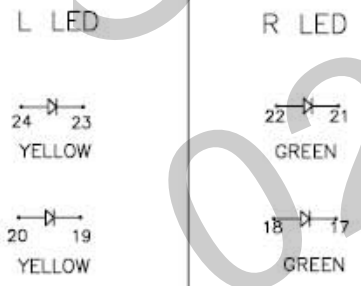
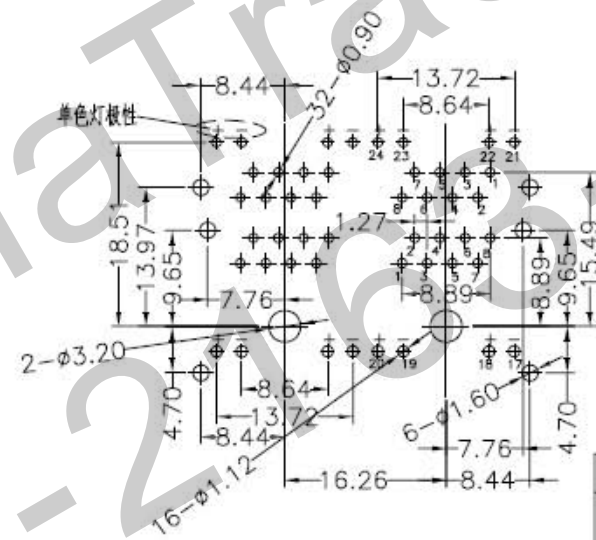
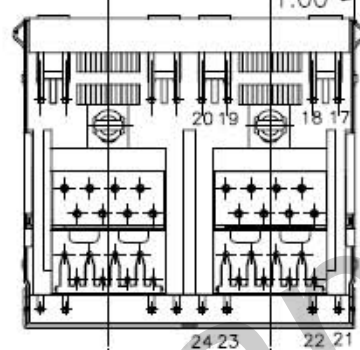
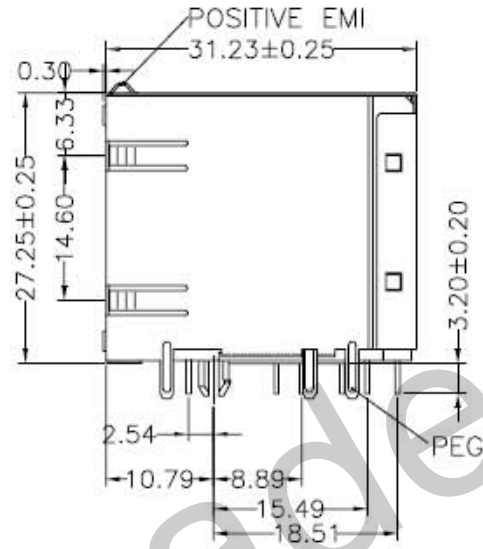


REV	MODIFICATION	DATE	DRAW	APPROVE
A	图纸发行	2012/10/29	JDL	Oscar

NOTES:

- MATERIAL:
- HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
 - CONTACT MATERIAL :PHOSPHOR BRONZE #0.46mm (C5100).
 - PLATING :GOLD PLATING OVER NICKEL.
 - SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - LED: OPTION.
- ELECTRICAL:
- VOLTAGE RATING :125 VAC RMS.
 - CURRENT RATING :1.5 AMP.
 - CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz, 1MIN.
 - LED RATINGS:FORWARD-VOLTAGE:2.2 VOLTS TYPICAL.
REVERSE VOLTAGE:5 VOLTS MAXIMUM.
- MECHANICAL:
- DURRABILITY:750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER
- ENVIRONMENTAL:
- STORAGE : -40°C TO +85°C.
 - OPERATION: -20°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

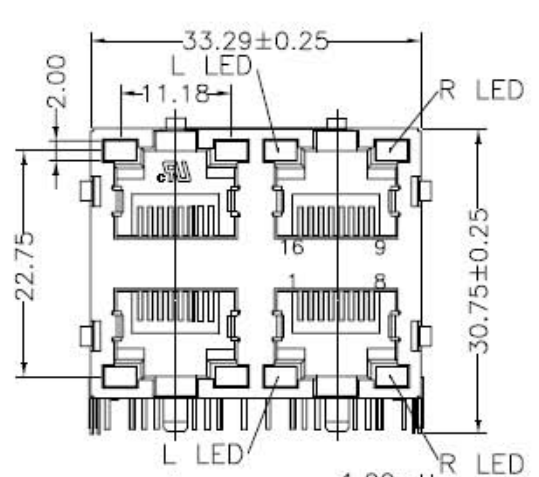

PC Board Layout

QC : Inspection Item CPK : Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		HDC 有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		文件号 FILE NO.	图号 DWG NO. GRJJ-H7236
	.X± 0.20	X.*± 1*	名称 TITLE	
	.XX± 0.15	.X*± 0.5*	59B 2X2 8PBC PCB JACK&SHIELDED WITH EMI FINGER SIDE ENTRY,ROUND PIN	
.XXX± 0.075		制图 DRAW Oscar	审核 CHECK	比例 SCALE 1:1
批准 APPROVE	检查 CHECK	制图 DRAW	审核 CHECK	数量 SHEET 1 / 1
		比例 SCALE 1:1	图幅 SIZE A3	更改 REV A