
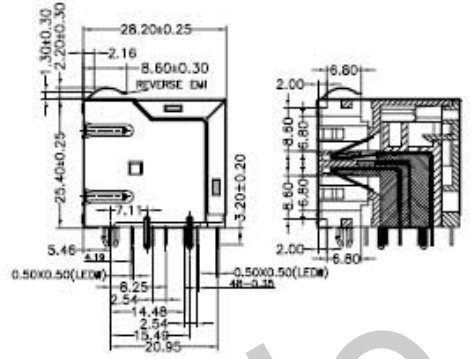


更改 REV	修改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	图纸发行	2012/10/29	JDL	Oscar

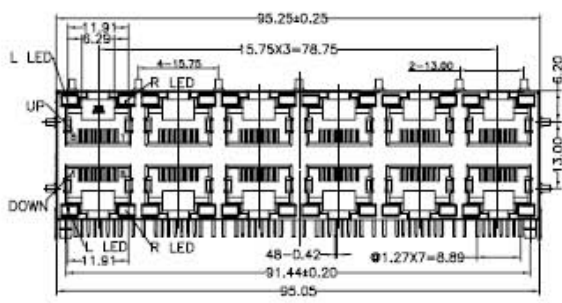

NOTES:





MATERIAL:
 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
 2.CONTACT MATERIAL :PHOSPHOR BRONZE Ø0.46mm (C5100).
 3.PLATING :GOLD PLATING OVER NICKEL.
 4.SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 5.LED OPTION.

ELECTRICAL:
 1.VOLTAGE RATING :125 VAC RMS.
 2.CURRENT RATING :1.5 AMP.
 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz, 1MIN.
 6.LED RATINGS:FORWARD VOLTAGE:2.2 VOLTS TYPICAL.
 REVERSE VOLTAGE:5 VOLTS-MAXIMUM.

MECHANICAL:
 1.DURRABILITY:750 CYCLES MIN.
 2.PCB RETENTION PRE-SOLDER

ENVIRONMENTAL:
 1.STORAGE : -40°C TO +85°C.
 2. OPERATION: -20°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

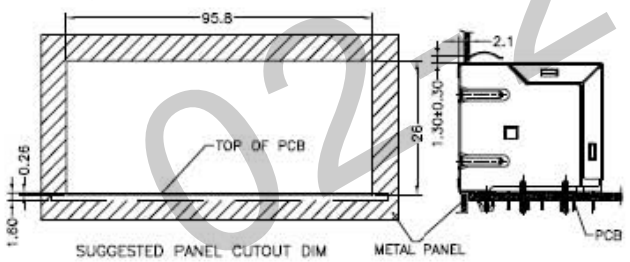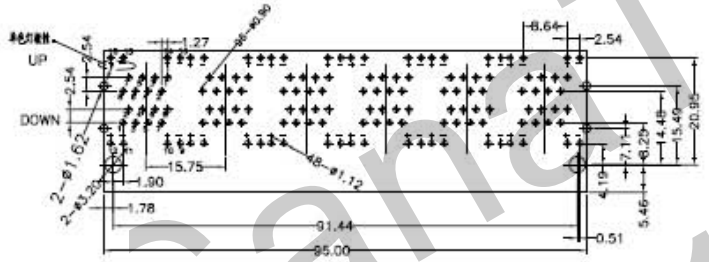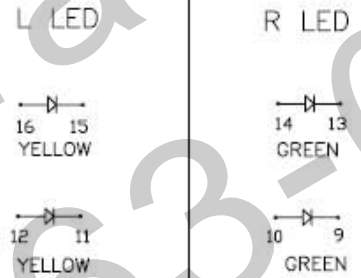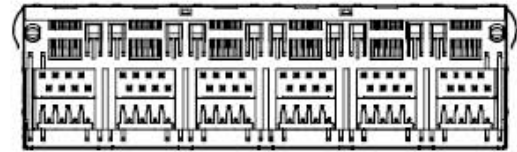

QC :inspection item Cp/Cpk and SPC Control item	DIMENSION IN mm [Inch]		HDC 有限公司	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		文件号 FILE NO.	图号 DWG NO. GRJJ-H7242
	.X± 0.20	X.*± 1*	标题 TITLE 59D 2X6 8PBC PCB JACK&SHIELDED WITH BACKWARD EMI FINGER ,SIDE ENTRY,FLAT PIN	
	.XX± 0.15	.X.*± 0.5*		
.XXX± 0.075		制图 DRAW Oscar	审核 PREL. 1/1	比例 SCALE 1:1
制图 DRAW	审核 CHECK	图幅 SIZE A3	数量 REV A	数量 REV A