



SCHEMATIC



PCB LAYOUT

RoHS
Compliance

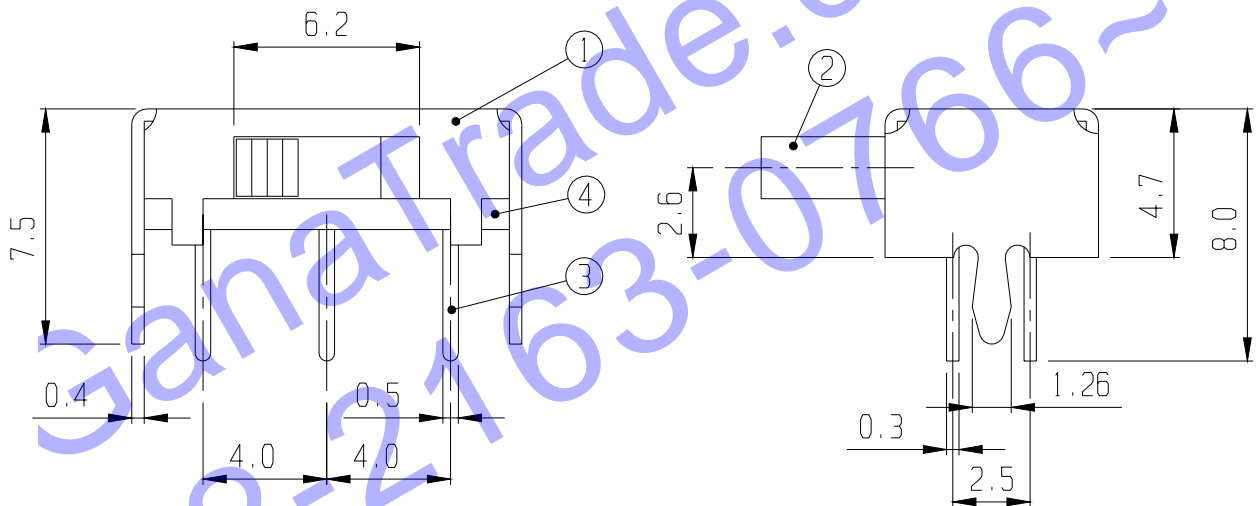

5	CONTACT	P B S	2	Ag PLATED	6	SPRING PLATE	P B S	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	VG 2-9
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: SIDE KNOB SLIDE SWITCH (2P2T)							
	RATING: DC 30V 0.3A	MODEL NO: 22H03 (
	CONTACT RESISTANCE: 30mΩ max.								
	INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.					
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 4:1	CHK'D.					
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02	APPD.					
	SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:						

BY: 
DATE: 24-AUG-2006

H D C 有 限 公 司

