


版本	变更内容	变更人	日期
A			

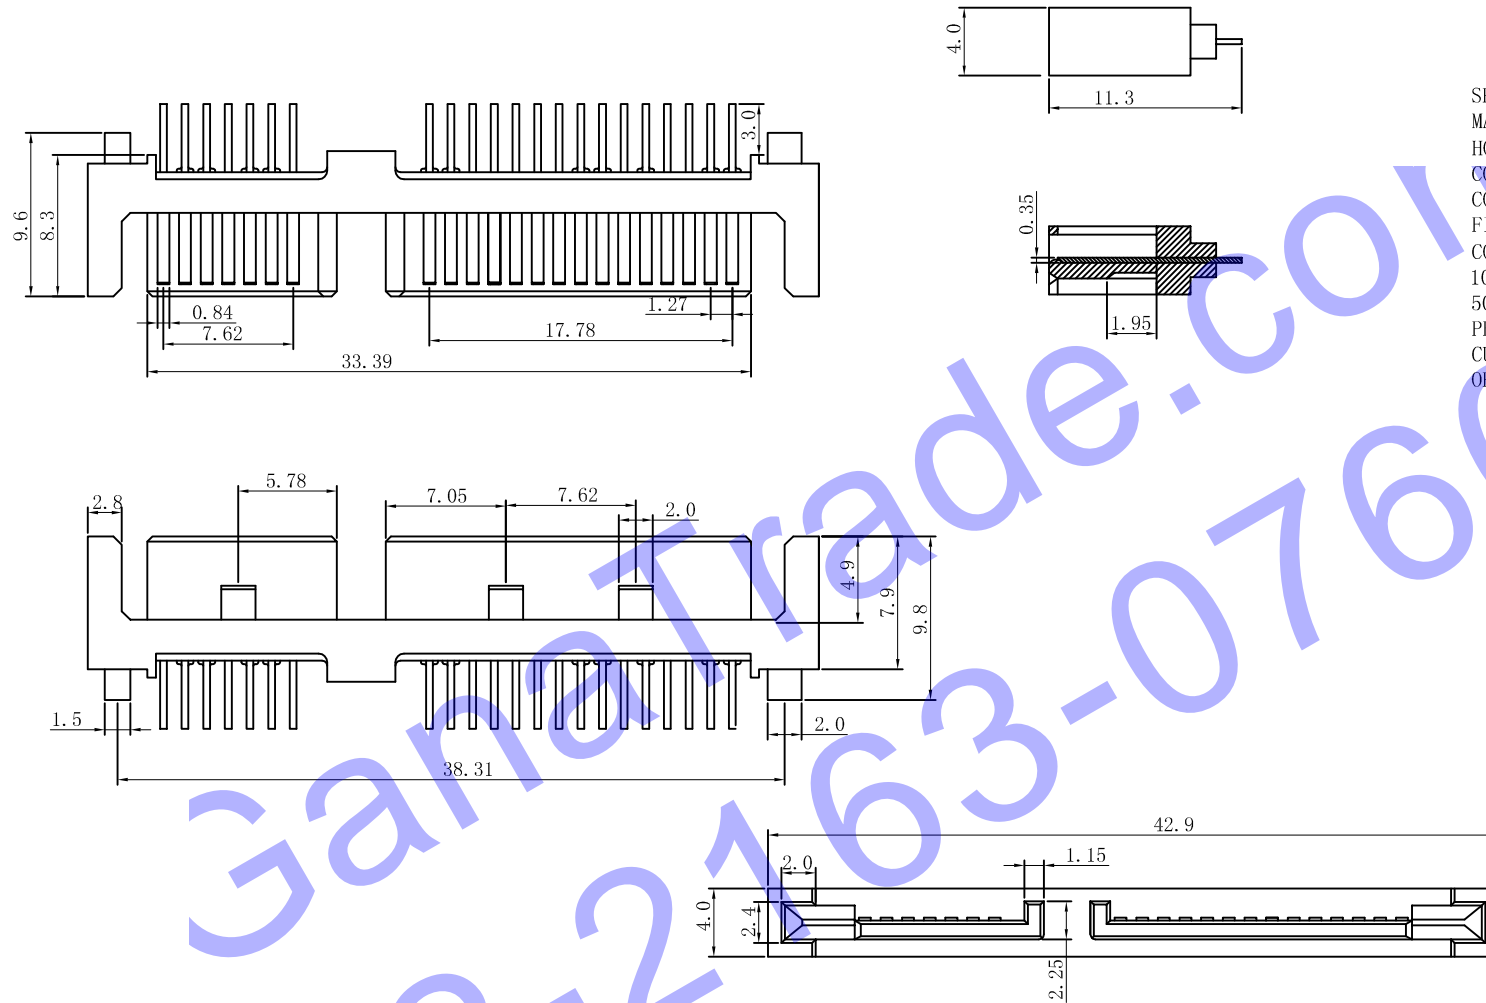

SPECIFICATION:
MATERIAL:
HOUSING: LCP LG431-9731L 30% G/F UL 94V-0
COLOR: BLACK
CONTACT: PHOSPHOR BRONZE C5191 H, T=0.25mm
FINISH:
CONTACT: 15u" GOLD/TIN PLATING ON CONTACT AREA
100u" MIN. TIN-LEAD PLATING ON SOLDER TAILS
50u" MIN. NICKEL UNDERPLATING OVER ALL
PERFORMANCE:
CURRENT RATING: 1.5 Amps MAX. PER PIN.
OPERATING TEMPERATURE: -55° C TO +105° C

GanTrade.com
02-2163-0766

X.	±0.2	X.*	±1.0'	客户:	产品名称: SATA 7+15P 公座180度DIP	HDC ELECTRONICS CO., LTD.	
.X	±0.15	.X*	±0.5'				
.XX	±0.1	.XX*	±0.2'	单位: MM	产品料号: GSTA - 715M - 06	核准:	日期:
.XXX	±0.05	.XXX*	±0.1'			审核:	日期:
 				材质:	图号:	数量:	比例: 1:1
					版次: A	设计: 康春香	日期: 08-11-5