

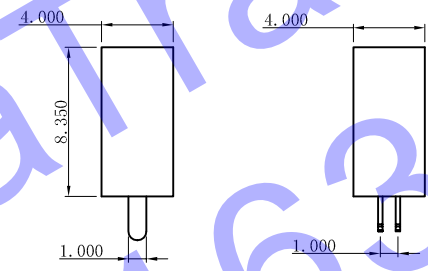
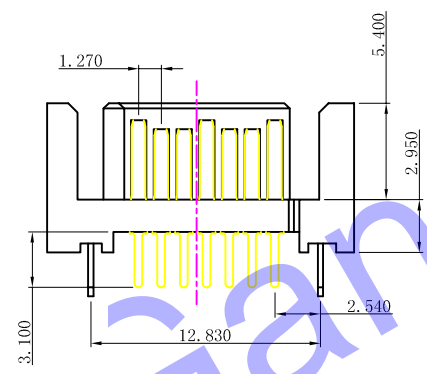
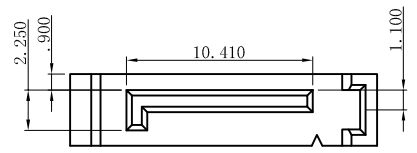




版本	变更内容	变更人	日期
A			

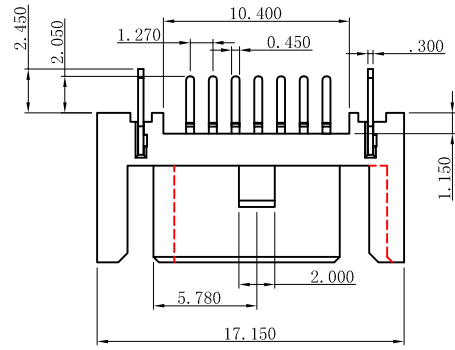

NOTM:

1. 胶芯材料为LCP+30%GFUL94V
2. 五金端子为C2680, 半金锡镀金3u
3. 功能尺寸位置, 毛边最大允许<0.05mm
非功能尺寸外观, 毛边最大允许<0.10mm
4. 产品符合ROHS环保标准

ZanataTrade.com
02-2163-0766

X.	±0.2	X.*	±1.0°	客户:	产品名称: SATA 7P A TYPE 双柱插板式	HDC ELECTRONICS CO., LTD.	
.X	±0.15	.X*	±0.5°				
.XX	±0.1	.XX*	±0.2°	单 位: MM	产品料号: GSTA-7M-02	核 准:	日期:
.XXX	±0.05	.XXX*	±0.1°			审 核:	日期:
 				材 质:	图 号:	审 核:	日期:
				数 量:	比 例: 1:1	版次: A	设计: 康春香