

MATERIALS:

Contacts: Bass.
 Insulator: HI.-TEMP. PLASTIC UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.



SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: 5000 Megohms Minimum at DC 500V.
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g. Maximum.
 Contact Separation Force: 21 g. Maximum.

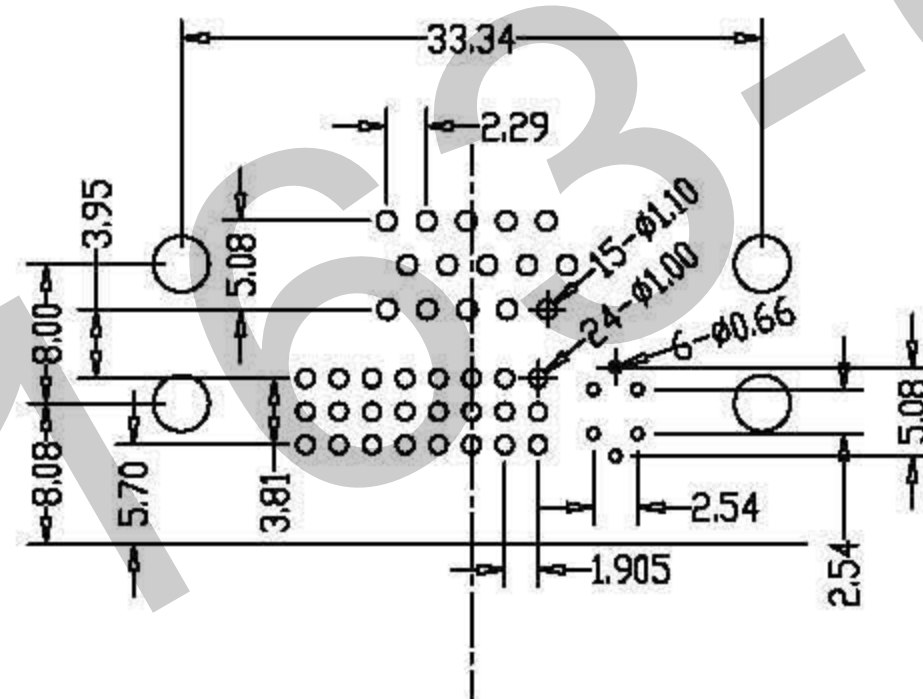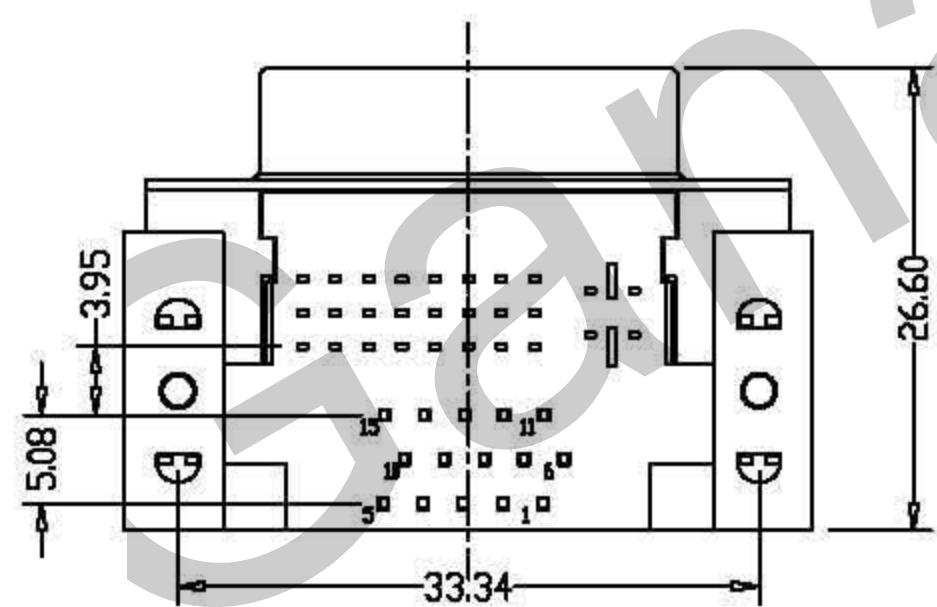

RECOMMENDED P.C.B LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: X ±0.1 XX ±0.1 XXX ±0.05 ANG. X ±0.5 X.I ±0.1	HDC 有限公司			
	APPROVED	DATE	NAME	
	LIN	2004/09/28	GSUB-	
	CHECKED	DATE	DRAWING NO	
STEVEN	2004/09/23	WT-1120-1529-0011		
UNIT	MM	SCALE	SIZE	REV
			A4	A