


RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: ±0.05mm

MATERIAL:
 INSULATOR:PBT+30% GLASS FIBER(UL94V-0).
 CONTACT:BRASS.
 CONTACTPLATED:GOLD PLATED ON CONTACT AREA,
 TIN PLATED ON SOLDER AREA
 SHELL:STEEL,NICKEL
 SPECIFICATION:
 CURRENT RATE:5 AMPS
 INSULATOR RESISTANCE:1000M MIN.AT 500V DC
 DIELECTRIC STRENGTH:1000V PER
 OPERATION TEMPERATURE:-55C TO+105C
 NOTICE: THE DIMENSION MADE WITH "△"
 MUST BE CONTROLLED BY QC.

POS.	A	B	C	E
15	30.80	24.99	16.90	2.29
26	39.2	33.32	25.30	2.29
44	53.10	47.04	39.00	2.29
62	70.00	63.50	55.20	2.41

UNLESS TOLERANCE	
GENERAL	ANGLE
X. ± 0.30	X' ± 3'
.X ± 0.20	.X' ± 2'
.XX ± 0.15	.XX' ± 1'
.XXX ± 0.05	.XXX' ± 0.5'

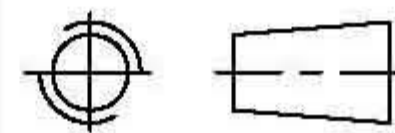

DRAW BY:	TONY	2005.05.11
DESIGN BY:	TONY	2005.05.11
CHECK BY:		
APPROVE BY:		
SCALE	SHEET	UNIT
1:1	1/1	mm

HDC 有限公司

PAPT NO:
 ITEM :
 HDR 15-62公(8.89)铆锁式

DRW NO: REV: 1.0