




# 1101E



## STEM HEIGHT

MODEL	H(mm)
1101E	4.3
1101EA	5.0



## SPECIFICATION


1. RATING : DC 12V 50mA
2. TRAVEL :  $0.25 \pm 0.1$ mm
3. CONTACT RESISTANCE : 100m MAX.
4. BOUNCE : 10m SEC MAX.
- 5.

MODEL	OPERATING FORCE	LIFE CYCLES
1101E -1	$130 \pm 30$ gf	50,000 CYCLE
1101E -2	$180 \pm 50$ gf	50,000 CYCLE
1101E -3	$250 \pm 50$ gf	30,000 CYCLE

## CIRCUIT DIAGRAM



## P.C.B LAND PATTERN

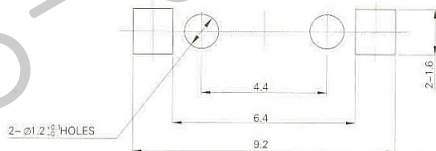

PACKING	REEL TYPE	
	With Embossing	Without Embossing
	1,101E,1101EA	1101NE,1101NEA
	1,200/1REEL(EA)	1,500/1REEL(EA)

