



1101R

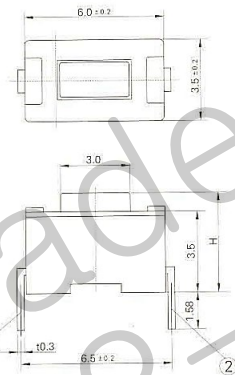

STEM HEIGHT

MODEL	H(mm)
1101R	4.3
1101RA	5.0



SPECIFICATION

1. RATING : DC 12V 50mA
2. TRAVEL : 0.25 ± 0.1 mm
3. CONTACT RESISTANCE : 100mΩ MAX.
4. BOUNCE : 10m SEC MAX.

MODEL	OPERATING FORCE	LIFE CYCLES
1101R -1	130 ± 30gf	50,000 CYCLE
1101R -2	180 ± 50gf	50,000 CYCLE
1101R -3	250 ± 50gf	30,000 CYCLE

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

