

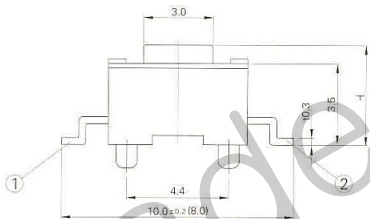



1101S



STEM HEIGHT

MODEL	H(mm)
1101S	4.3
1101SA	5.0



SPECIFICATION


1. RATING : DC 12V 50mA
2. TRAVEL : 0.25 ± 0.1mm
3. CONTACT RESISTANCE : 100mΩ MAX.
4. BOUNCE : 10m SEC MAX.
- 5.

MODEL	OPERATING FORCE	LIFE CYCLES
1101S -1	130 ± 30gf	50,000 CYCLE
1101S -2	180 ± 50gf	50,000 CYCLE
1101S -3	250 ± 50gf	30,000 CYCLE

CIRCUIT DIAGRAM



P.C.B LAND PATTERN

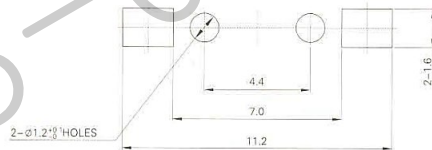

PACKING

	REEL TYPE	
	With Embossing	Without Embossing
	1101S,SA	1101NS,NSA
	1,500/1 REEL(EA)	1,500/1 REEL(EA)

