
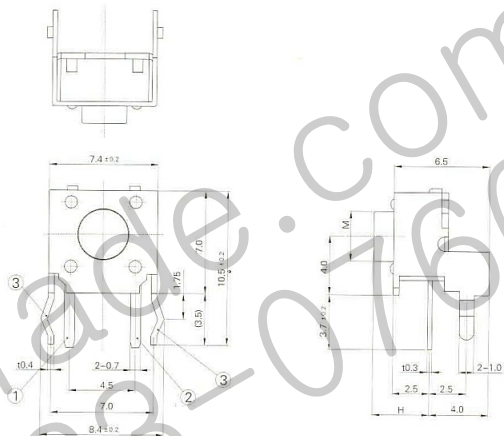


1102L




SPECIFICATION

1. RATING : DC 12V 50mA
2. CONTACT RESISTANCE : 100m Ω MAX.
3. TRAVEL : 0.25 ± 0.1 mm
4. BOUNCE : 10m SEC MAX.

5.

MODEL	OPERATING FORCE	LIFE CYCLES	
1102L-0, 0S	100 \pm 30gf	80,000	1,000,000
1102L-1, 1S	130 \pm 30gf	80,000	1,000,000
1102L-2, 2S	160 \pm 50gf	80,000	1,000,000
1102L-3, 3S	250 \pm 50gf	50,000	300,000
1102L-4, 4S	350 \pm 80gf	50,000	200,000
1102L-5, 5S	500 \pm 100gf	30,000	100,000

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

