



1103E

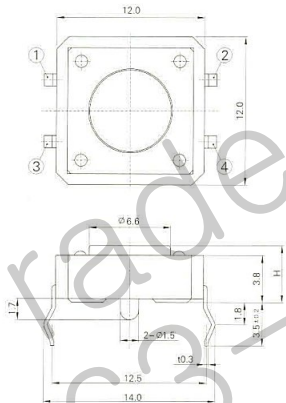

STEM HEIGHT

MODEL	H(mm)
1103E	4.3
1103EA	11.6
1103EB	7.7
1103EC	7.7
1103ED	12




SPECIFICATION

1. RATING : DC 12V 50mA
2. CONTACT RESISTANCE : 100mΩ MAX.
3. TRAVEL : 0.3 ± 0.1mm
4. BOUNCE : 10m SEC MAX.

5.

MODEL	OPERATING FORCE	LIFE CYCLES
1103E-1	130 ± 30gf	300,000 CYCLE
1103E-2	180 ± 50gf	300,000 CYCLE
1103E-3	250 ± 50gf	100,000 CYCLE

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

