


1107G

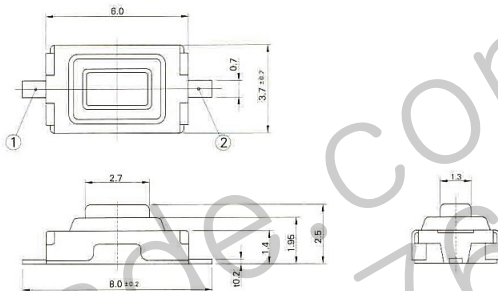

SPECIFICATION


1. RATING : DC 12V 50mA
2. CONTACT RESISTANCE : 100mΩ MAX.
3. TRAVEL : 0.25 ± 0.1mm
4. BOUNCE : 10m SEC MAX.
- 5.

MODEL	OPERATING FORCE	LIFE CYCLES
1107G -1	130 ± 30gf	50,000 CYCLE
1107G -2	180 ± 50gf	50,000 CYCLE
1107G -3	250 ± 50gf	30,000 CYCLE

CIRCUIT DIAGRAM



P.C.B LAND PATTERN



PACKING

REEL TYPE

1107G

3,000/1REEL(EA)

